
## **CHEROKEE NATION Environmental Programs**

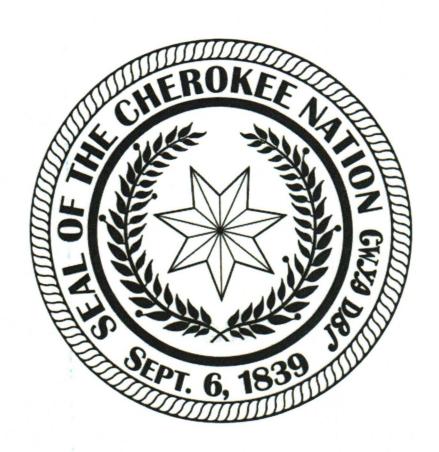

# **Asbestos Sampling Report**

PARTICIPANT: Belt, Betty

PREPARED BY: DATE: 5. 01-23

REQUESTED BY: CHEROKEE NATION HOUSING REHABILITATION (HUD) -GEORGE HUBBARD

### TABLE OF CONTENTS

- I. SITE INSPECTION/DESCRIPTION
- II. BACKGROUND
- III. FIELD PROCEDURES AND ANALYTICAL METHODS
- IV. SUMMARY OF FINDINGS
- V. CONCLUSIONS

APPENDIX A: PROJECT SCOPE OF WORK

APPENDIX B: LABORATORY REPORT & CHAIN OF CUSTODY

APPENDIX C: SITE PHOTOGRAPHS

### I. Site Inspection/Description

Cherokee Nation Environmental Programs (CNEP) has conducted asbestos sampling for the presence of asbestos containing materials (ACM) for the following site:

Site Name: Betty Belt

Address: 1005 South State Ave Tahlequah, OK 74464

Phone 918-457-7766

Lat/Long N35.90260, W094.097824

The sampling was performed to determine the presence of all ACM from within the affected parts of the structure for EPA's National Emissions of Hazardous Air Pollutants (NESHAP) compliance as well as OSHA worker protection.

The inspector responsible for this project was: Christopher Cochran ODOL, AHERA Inspector, License No: 401244

The sampling was conducted on April 17<sup>th</sup>, 2023 at the request of the Cherokee Nation Housing Rehabilitation Department.

The site is a single family home built in 1960. Sampling was limited to areas that would be affected by the project scope of work (Appendix A) provided by the rehabilitation department.

ACM was found at the last visit to the home.

### II. BACKGROUND

The Oklahoma Department of Environmental Quality (ODEQ) has adopted EPA's NESHAP regulation under OAC252:100, 41-15 and has been delegated authority in the state of Oklahoma for its enforcement. Section 61.145(a) of Federal EPA regulation states that prior to commencement of the demolition or renovation of a facility a thorough inspection of the affected part or parts of a facility is required to determine the presence of all asbestos including Category I and Category II non-friable, and friable ACM. ACM is defined by EPA and OSHA as any material that contains greater than 1% asbestos.

### III. FIELD PROCEDURES AND ANALYTICAL METHODS

During the on-site inspection, we visually assessed the physical characteristics of suspect asbestos-containing materials (SACM) based on homogeneous areas. Homogeneous areas are areas of asbestos similar in color, texture, and construction, date of application, and in general appearance. For purposes of renovation and demolition, homogeneous areas of SACM can be further classified according to NESHAPs rules by whether the material is friable, Category I non-friable, or Category II non-friable.

<u>Friable ACM</u> is defined by NESHAPs rules as any material containing more than 1% asbestos as determined by Polarized Light Microscopy (PLM), that, when dry, can be crumbled, pulverized or reduced to powder by hand pressure.

<u>Category I Non-friable ACM</u> is defined by NESHAPs rules as any asbestos-containing packings, gaskets, construction mastics, resilient floor covering (i.e. floor tiles, roll sheet flooring) or asphalt roofing products that contain more than 1% asbestos as determined by PLM.

Category II Non-friable ACM is defined by NESHAPs rules as any material, excluding Category I non-friable ACM, containing more than 1% asbestos as determined by PLM, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Typically, non-friable materials, such as transite (cementious products) and vinyl floor tiles are not regulated by the State of Oklahoma provided they do not become friable. General deterioration, machine grinding, drilling, sanding, and dry-buffing are all ways of causing non-friable materials to become classified as Regulated Asbestos Containing Materials (RACM). All friable materials are classified RACM. Please note that the following materials, even though classified as non-friable are fully regulated by Oklahoma Department of Labor for removal purposes as friable material: ceiling tiles, roll sheet flooring (linoleum), and joint wall compound when deemed friable

In addition to classification of suspect material into friable and non-friable materials, a determination of current condition was conducted as part of the physical assessment. The condition noted is the representative of the material at the time of inspection. Conditions of materials can change very quickly when disturbed. All suspect material was placed in one of the following categories of condition.

Significantly damaged: Material that is damaged, blistered, deteriorated, water stained over at least 10% of its total area.

<u>Damaged</u>: Material that is damaged, blistered, deteriorated, water stained less than 10% of its total area.

Good: Material that has no visible damage or deterioration.

Guidelines used for the number of samples collected per homogeneous area were determined using the Asbestos Hazard Emergency Response Act (AHERA) protocol promulgated in 40 CFR 763, Appendix E as follows:

Surfacing materials – material that is sprayed or troweled on wall, ceilings, or support columns for fireproofing, acoustical, or even decorative purpose.

- Less than 1000 ft2 Minimum 3 samples
- From 1000-5000 ft2 Minimum 5 samples
- Greater than 5000 ft2 Minimum 7 samples

Thermal System Insulation(TSI) materials – thermal system insulation material applied to tanks, boiler, pipes or other structural component for an insulating purpose.

- May omit areas of fibrous glass, foam glass, rubber, and Styrofoam form sampling.
  Areas that have mastic on seams or outer jacketing will be sampled.
- At least three samples must be collected from each homogeneous area of TSI.
- Plus an additional sample from each patched area of less than 6 linear feet.
- Fittings require a sufficient amount to determine positive or negative nature.
- Inspector will first collect samples from damaged areas, exposed ends, or areas missing jacketing first.

Miscellaneous materials – all other material that are not thermal system insulation or surfacing materials. This includes gaskets, packings, joint wall compound, cementious asbestos materials, ceiling tiles resilient flooring materials, construction mastics, etc..

- May assume and document as such
- A sufficient amount of samples to determine negative or positive nature. A minimum or one per suspect homogeneous area.
- Collect samples from inconspicuous locations.
- Material such as cementious asbestos or vibration dampening cloths should not be sampled and will be assumed ACM unless instructed by client to collect these samples.

Bulk samples of suspect ACM were analyzed by Polarized Light Microscopy (PLM) in accordance with EPA Methods 600R-93/116. All samples were sent to a NVLAP accredited laboratory for analysis. Quantem Laboratories (NVLAP # 101959-0) in Oklahoma City, OK analyzed the samples. A copy of the full laboratory report and chain of custody can be found in Appendix B.

### IV. SUMMARY OF FINDINGS

A total of 13 samples were analyzed from 2 homogeneous area due to multi-layers of material within some homogeneous sample areas. Photographs of all ACM can be found in Appendix C. All accessible and observable areas within the renovation area were sampled for ACM. Samples were not taken of suspect materials that may have placed the inspector at risk of injury (i.e. electrical panel boxes). Any suspect ACM that have not been tested and/or found positive for asbestos must be assumed ACM until they are analyzed. Upon review of laboratory analysis, the following asbestos containing materials can be found in Table 1. All suspect ACM samples that were analyzed and did not contain asbestos can be found in Table 2.

Sample #	Material Description	Locations	Friability (Friable, NF Cat I NF Cat II)	Condition	Sample Results (% Asbestos)
01-01- 01-05	White wall texture/Joint wall Compound	Through Out	Friable	Damaged	3% Chrysotile
	27				

Table 2.	Non – Asbestos Containing M	aterials		
Sampl e #	Material Description	Locations	Condition	Sample Results (% Asbestos)
02-01	Gray Shingle	Roof	Damaged	Not Present
	0			
		1.		

### V. CONCLUSIONS

Asbestos is not always an immediate hazard. Intact and undisturbed ACM does not pose a health risk. They may, however become a health hazard if they are damaged, disturbed, or deteriorate over time and release fibers into the air. There are no federal, state, or Tribal laws mandating asbestos removal. It is only when the material can no longer be maintained in good condition and/or airborne concentrations of asbestos are measured and found to be above a permissible exposure limit (PEL), or when the building is to be demolished or renovated, that removal may become necessary. Any renovation/demolition work which may impact these positive materials should be conducted in accordance with all applicable Federal, state, and local regulations.



2033 HERITAGE PARK DR, OKLAHOMA CITY, OK 73120 1.800.822.1650

### Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 357596

Account Number: C162

Date Received:

04/19/2023

Received By:

Baylie Longstreth

Date Analyzed: Analyzed By:

Methodology:

04/19/2023

Benjamin Hill

EPA/600/R-93/116

Client: Cherokee Nation Environmental Programs

Chris Cochran PO Box 948

Tahlequah, OK 74464

Project: Betty Belt Project Location: Tahlequah

Project Number: N/A

QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)	Non Fibrous
001	01-01	Layered	Tan Texture	Asbestos Present Chrysotile 3	NA	CaCO3 Paint
001a		Layered	White Sheetrock	Asbestos Not Present	Cellulose 15	Gypsum
002	01-02	Layered	White Texture	Asbestos Not Present	NA	CaCO3 Paint
002a		Layered	White Sheetrock	Asbestos Not Present	Cellulose 15	Gypsum
003	01-03	Layered	Tan Texture	Asbestos Present Chrysotile 3	NA	CaCO3 Paint
003a		Layered	White Sheetrock	Asbestos Not Present	Cellulose 15	5 Gypsum
004	01-04	Layered	Beige Wall Paper	Asbestos Not Present	Cellulose 80	) Paint

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA/600/M4-82-020 and EPA/600/R-93/116 methods. This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory.



2033 HERITAGE PARK DR, OKLAHOMA CITY, OK 73120 | 1.800.822.1650

### Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 357596

Account Number:

C162

Date Received:

04/19/2023

Received By:

Baylie Longstreth

Date Analyzed:

04/19/2023

Analyzed By:

EPA/600/R-93/116

Client: Cherokee Nation Environmental Programs

Chris Cochran

PO Box 948

Tahlequah, OK 74464

Methodology:

Benjamin Hill

Project: Betty Belt

Project Location: Tahlequah

Project Number: N/A

**OuanTEM** 

Client

Color /

Non-Asbestos

Non Fibrous

Sample ID	Sample ID	Composition	Description	Asbestos (%)	Fiber (%)		Non Fibrous
004a		Layered	White	Asbestos Not Present	Cellulose	15	Gypsum
			Sheetrock				Paint
005	01-05	Layered	Beige	Asbestos Not Present	NA		CaCO3
003	01-03	Layered	Texture	Aspestos Not Present	NA		Paint
005a		Layered	White	Asbestos Not Present	Cellulose	15	Gypsum
			Sheetrock				
200	02.01						
006	02-01	Layered	Black Tar	Asbestos Not Present	NA		Tar CaCO3
		4					
006a		Layered	Brown/Gray	Asbestos Not Present	Glass Fiber	25	Tar
			Shingle				Sand
							_
006ь		Layered	Black Tar	Asbestos Not Present	NA		Tar CaCO3
			ı aı				

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA/600/M4-82-020 and EPA/600/R-93/116 methods. This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory.



2033 HERITAGE PARK DR, OKLAHOMA CITY, OK 73120 | 1.800.822.1650

Chris Cochran PO Box 948

Tahlequah, OK 74464

### Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 357596

Account Number:

C162

Date Received:

04/19/2023

Received By:

Baylie Longstreth

Date Analyzed:

04/19/2023

Analyzed By: Methodology:

QuanTEM

Sample ID

Benjamin Hill

EPA/600/R-93/116

Sample ID

Client

Composition

Color /

Description

Project Location: Tahlequah

Project Number: N/A

Project: Betty Belt

Asbestos (%)

Non-Asbestos

Client: Cherokee Nation Environmental Programs

Non Fibrous

Fiber (%)

Benjamin Hill

Benjamin Hill, Assistant Laboratory Manager

4/20/2023

Date of Report



# **ASBESTOS CHAIN OF CUSTODY**

Page 1 of

# LEG

2033 Heritage Park Drive, C	2033 Heritage Park Drive, Oklahoma City, OK 73120-7502	For Lab Use Only	
(800) 822-1650 • (405) /5	(800) 822-1650 • (405) 755-7272 • Fax: (405) 755-2058	Lab No. 357596	
LEGAL DOCUMENT	LEGAL DOCUMENT - PLEASE PRINT LEGIBLY	(Accept) Reject	
	Project Information	Report Results (☑ one box)	
Phone: (918) 453-5009 Project Name:	Project Name: Betty Belt	QuanTEM Website	
Cell Phone: (918) 316-7452 Project Location: Tahlequah	Project Location: Tahlequah	Fmail Chistopher-cochan@charokee.org	
E-mail: Christopher-cochan@cherokee.org Project ID:	Project ID:	Other	

4/19/03 9245 DATE & TIME

RECEIVED BY

289369

P.O. Number:

Date: 4/17/2023 DATE & TIME 4/17/2022

SAMPLED BY: Name: Christopher Cochran

RELINQUISHED BY Chris Cochran

Christopher Cochran

Contact:

Account #: C162

Company: Cherokee Nation

Phone:

Contact Information

VIA

_											
				REQ	<b>UESTED S</b>	REQUESTED SERVICES (Please ☑ the Appropriate Boxes)	ropriate	Boxes)			
I		PLM		PLM		TEM		TEM		TUT	TURNAROUND TIME
	8	Bulk Analysis (EPA 600/R-93/116)	93/116)	Vermiculite Attic Insulation		Air- AHERA	8	Bulk- Presence / Absence EPA600/R-93/116	PA600/R-93/116		Rush
	A A	400 Point Count	JE	(EPA 600/R-04/004)		Air- NIOSH 7402		Bulk- Quantitative [weight%]- Chatfield	%]- Chatfield		Same Day
		1000 Point Count		Outer		Air- ISO 10312	2	Dust- Presence / Absence		N	24 - Hour
	©	Gravimetric Preparation		PCM		Drinking Water- EPA 100.2	<u>a</u>	Dust- Quantitative [fibers/sq.cm]- ASTM D5755	q.cm]- ASTM D5755		3 - Day
	R.	Particle ID		NIOSH 7400		Waste Water- EPA 600/4-83-043	Other	her			5 - Day
	No.	Sample ID (10 Characters Max)	☑ To Be Analyzed	e Color		Description		Volume / Area (as applicable)	Comments / Notes	its / N	otes
345	-	01-01 - 01-05	2	White	Wall Te	Wall Texture/Joint Wall Compound	pu	Through Out			
9	2	02-01	2	Gray		Shingle		Roof			
	m										
L	4										
	S										
	9										
1	7										
	00										
	0										
1			C								

SATURDAY FEDEX SAMPLE DELIVERY - CALL TO SCHEDULE • Use this address for Saturday Delivery only: 4220 N. Santa Fe Ave., Oklahoma City, OK 73105-8517 • Mark Package "Hold for Saturday Pickup" Please Note - UPS and USPS are NOT available for Saturday Delivery

234