



TYPICAL FAN DETAILS

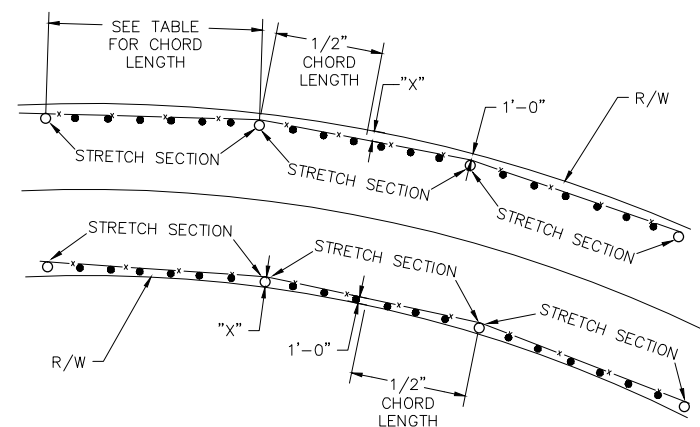


TYPICAL PLACEMENT FOR CURVES

SPACING FOR STRETCHER SECTION	
UP TO 1'00' CURVE	STANDARD FENCE
1'00' - 3'00'	96' CHORDS
3'00' - 6'00'	60' CHORDS
OVER 6'00'	36' CHORDS

SPACING FROM R/W TO FENCE	
DEGREE	"X"
1'00'	1.20'
2'00'	1.40'
3'00'	1.60'
4'00'	1.31'
5'00'	1.39'
6'00'	1.47'
7'00'	1.20'
8'00'	1.23'
9'00'	1.25'
10'00'	1.28'

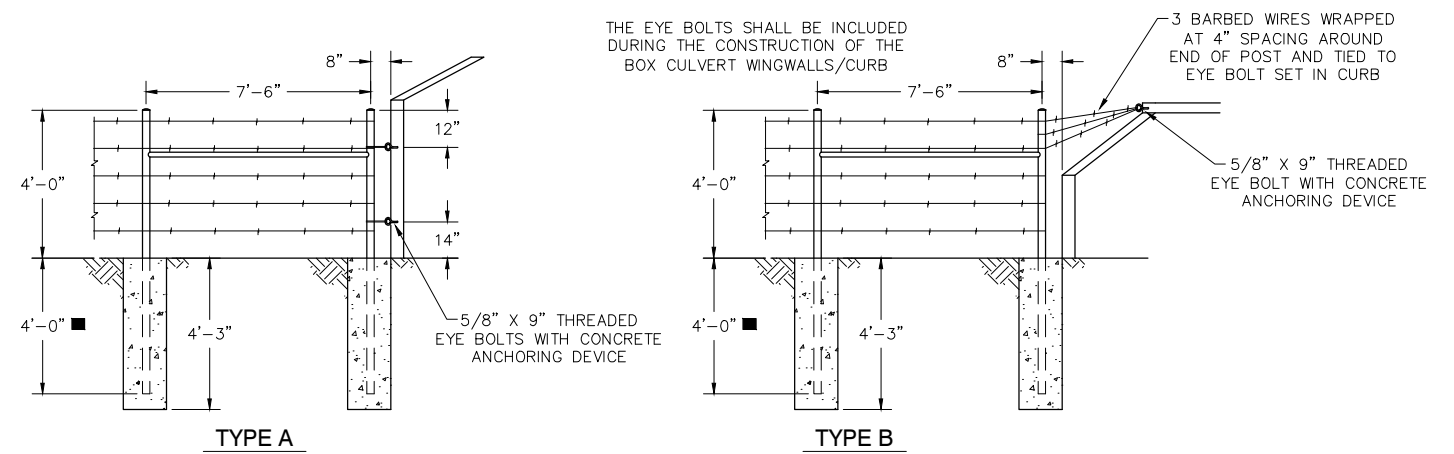

CONNECTIONS AT CULVERTS

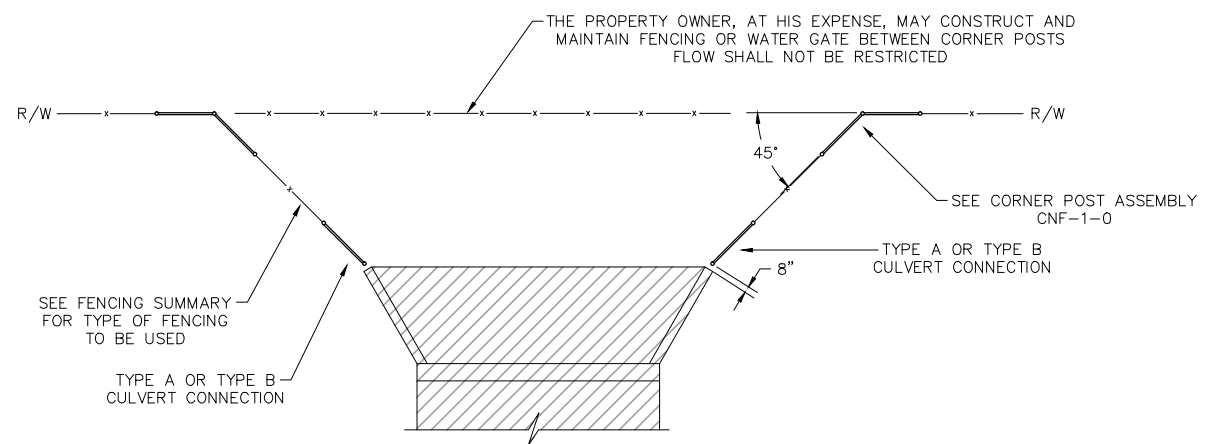

GENERAL NOTES:

- FENCE SHALL BE ON THE OUTSIDE OF POSTS AWAY FROM CENTERLINE OF ROADWAY AND CONSTRUCTED ONE FOOT INSIDE OF THE PERMANENT RIGHT OF WAY.
- ALL MISCELLANEOUS HARDWARE SHALL BE FURNISHED GALVANIZED OR ALUMINUM COATED.
- PAYMENT FOR GATES SHALL INCLUDE ALL HINGES, LATCHES AND INCIDENTALS NECESSARY TO COMPLETE THE INSTALLATION.
- ALL WIRES SHALL MAKE TWO WRAPS AROUND EACH END POST, THEN AROUND ITSELF TWO TURNS.
- STRETCHER POSTS TO BE USED GENERALLY AT HILLTOPS AND VALLEYS AND AT A MINIMUM SPACING OF FIVE HUNDRED FEET.
- ALL CORNER/END/STRETCHER/FAN/GATE POSTS SHALL BE EMBEDDED IN CONCRETE AS SHOWN. THE ALTERNATE DRIVEN POSTS MAY BE USED WHERE CONCRETE FOOTINGS ARE NOT FEASIBLE. SEE ALTERNATE DRIVEN POST DETAIL ON CNF-1-0.

CHEROKEE NATION STANDARD FENCING DETAILS CNF-2-0		
PROJECT NO. CN-0743/0741-04	DRAWN BY: DMOORE	DATE: 4/2012
PROJECT NAME TWIN OAKS/BULL HOLLOW ROAD	CHECK BY: JK	SHEET 2 of 2