


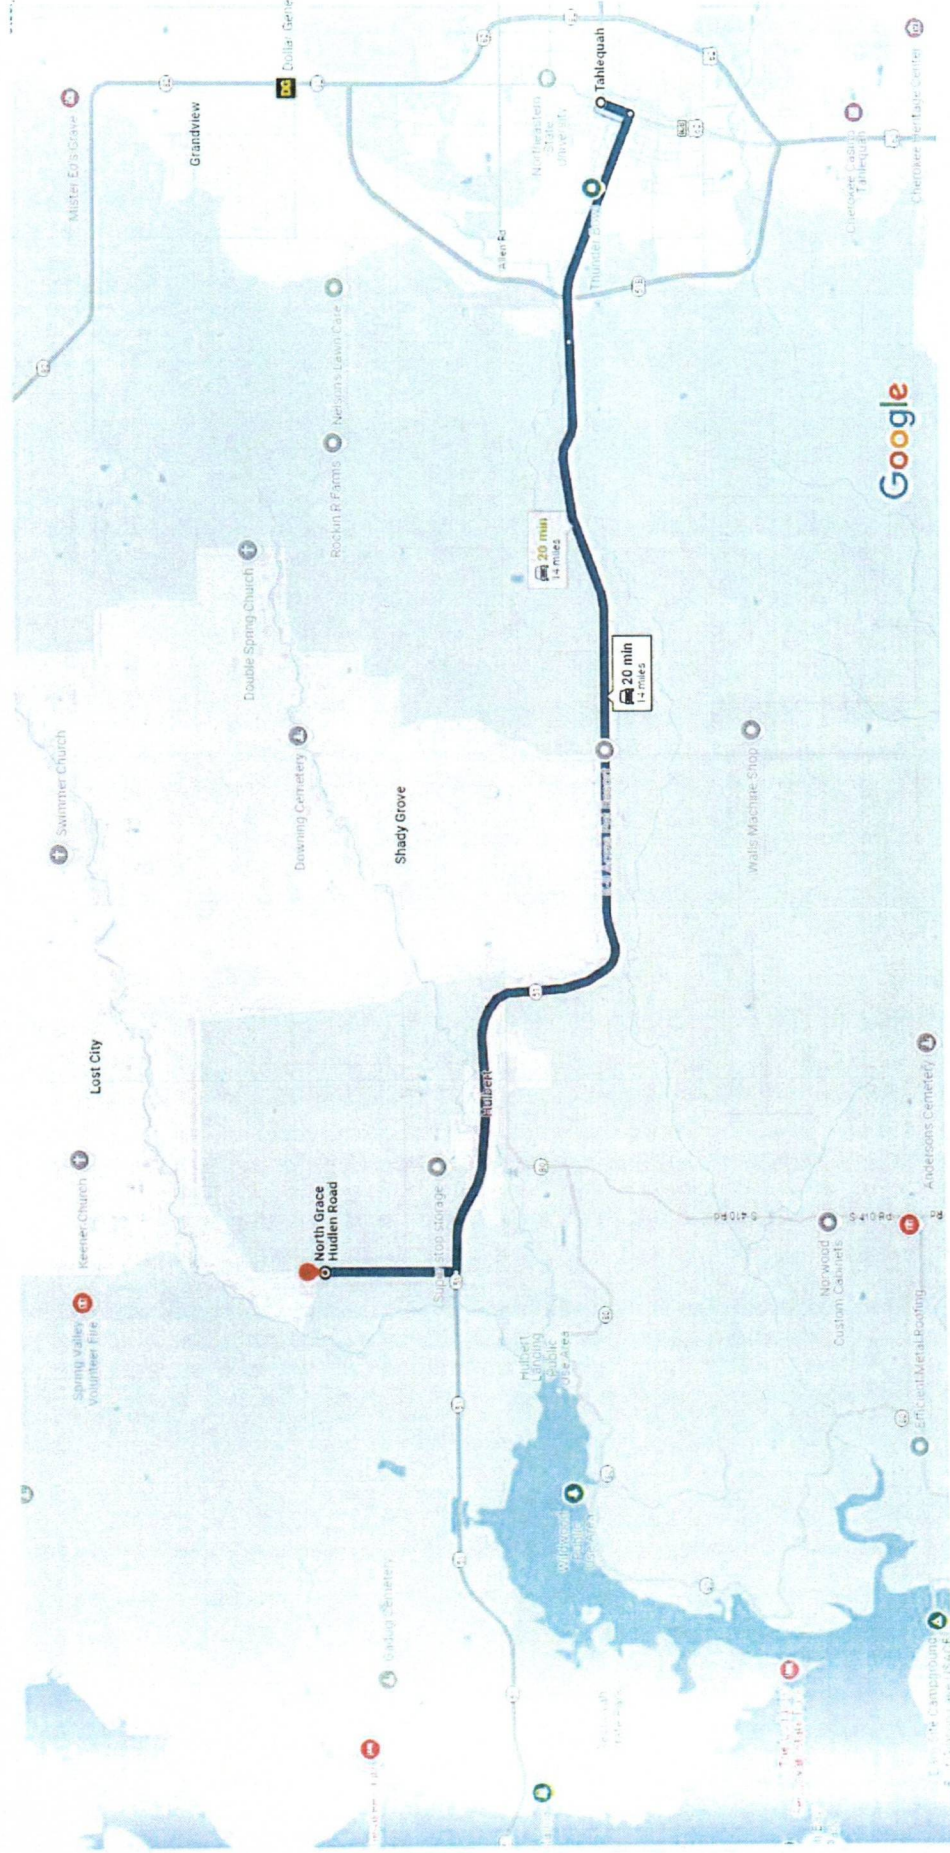

Tahlequah Oklahoma 74464

- ↑ 1. Head south on S Muskogee Ave toward W Shawnee St
- ⓘ Pass by BancFirst (on the right in 0.2 mi)

- 0.3 mi
2. Turn right onto W Choctaw St
- 2.3 mi
3. Continue onto OK-51 W
- 10.1 mi
4. Turn right onto N Grace Hudlen Rd
- 1.3 mi

N Grace Hudlen Rd
Oklahoma 74441



Housing Authority of the Cherokee Nation
PO Box 1007,
Tahlequah, Oklahoma 74465-1007
918-456-5482 | 1-800-837-2869


Description	Quantity	Per
ESTIMATE: Structure (Housing Authority of the Cherokee Nation)		Claim #10523, Kimberly Jones
Approved		
ROOFPLAN: Roofplan		

General Items

1 Sheathing, Roof OSB, 1/2" - Replace	224.00 (235.20)	SF
Includes 5% waste on material quantity.		
replace where needed		
match existing		
2 Dumpster 20 Yard	1	EA
3 Roof Vent, Static, Box/Turtle, Aluminum - Replace	5	EA

Roof, Roof 2, Roof 3

Roof area: 2,727.13 SF **Squares:** 27.3 SQ **Soffit:** 543.07 SF
Eaves: 143.00 LF **Ridge:** 69.50 LF



4 Flashing, Plumbing Vent Aluminum - Tear Out	2	EA
5 Flashing, Plumbing Vent Aluminum - Replace	2	EA
6 Ridge Cap Shingles, Fiberglass - Remove	69.50	LF
7 Ridge Cap Shingles, Fiberglass - Replace	69.50 (76.45)	LF
Includes 10% waste on material quantity.		
8 Shingles, Laminated/Architectural Very Good - Tear Out	27.26	SQ
9 Shingles, Laminated/Architectural Very Good - Replace	27.26 (30.00)	SQ
Includes 10% waste on material quantity.		
10 Drip Edge (Rake + Eave) Galvanized - Replace	292.10 (306.71)	LF
Includes 5% waste on material quantity.		
11 Fascia, Wood Cedar 1" x 6" - Remove	292.10	LF
12 Fascia, Wood Cedar 1" x 6" - Replace	292.10 (306.71)	LF
Includes 5% waste on material quantity.		
13 Step Flashing, Galvanized - Tear Out	45.15	LF
14 Step Flashing, Galvanized - Replace	45.15 (47.41)	LF
Includes 5% waste on material quantity.		

Total Cost: _____

Date: _____

Contractor
Signature: _____