


No.	Description	Date
1	ASI #001	6/29/2016

REVISIONS


No.	Description	Date

Consultants

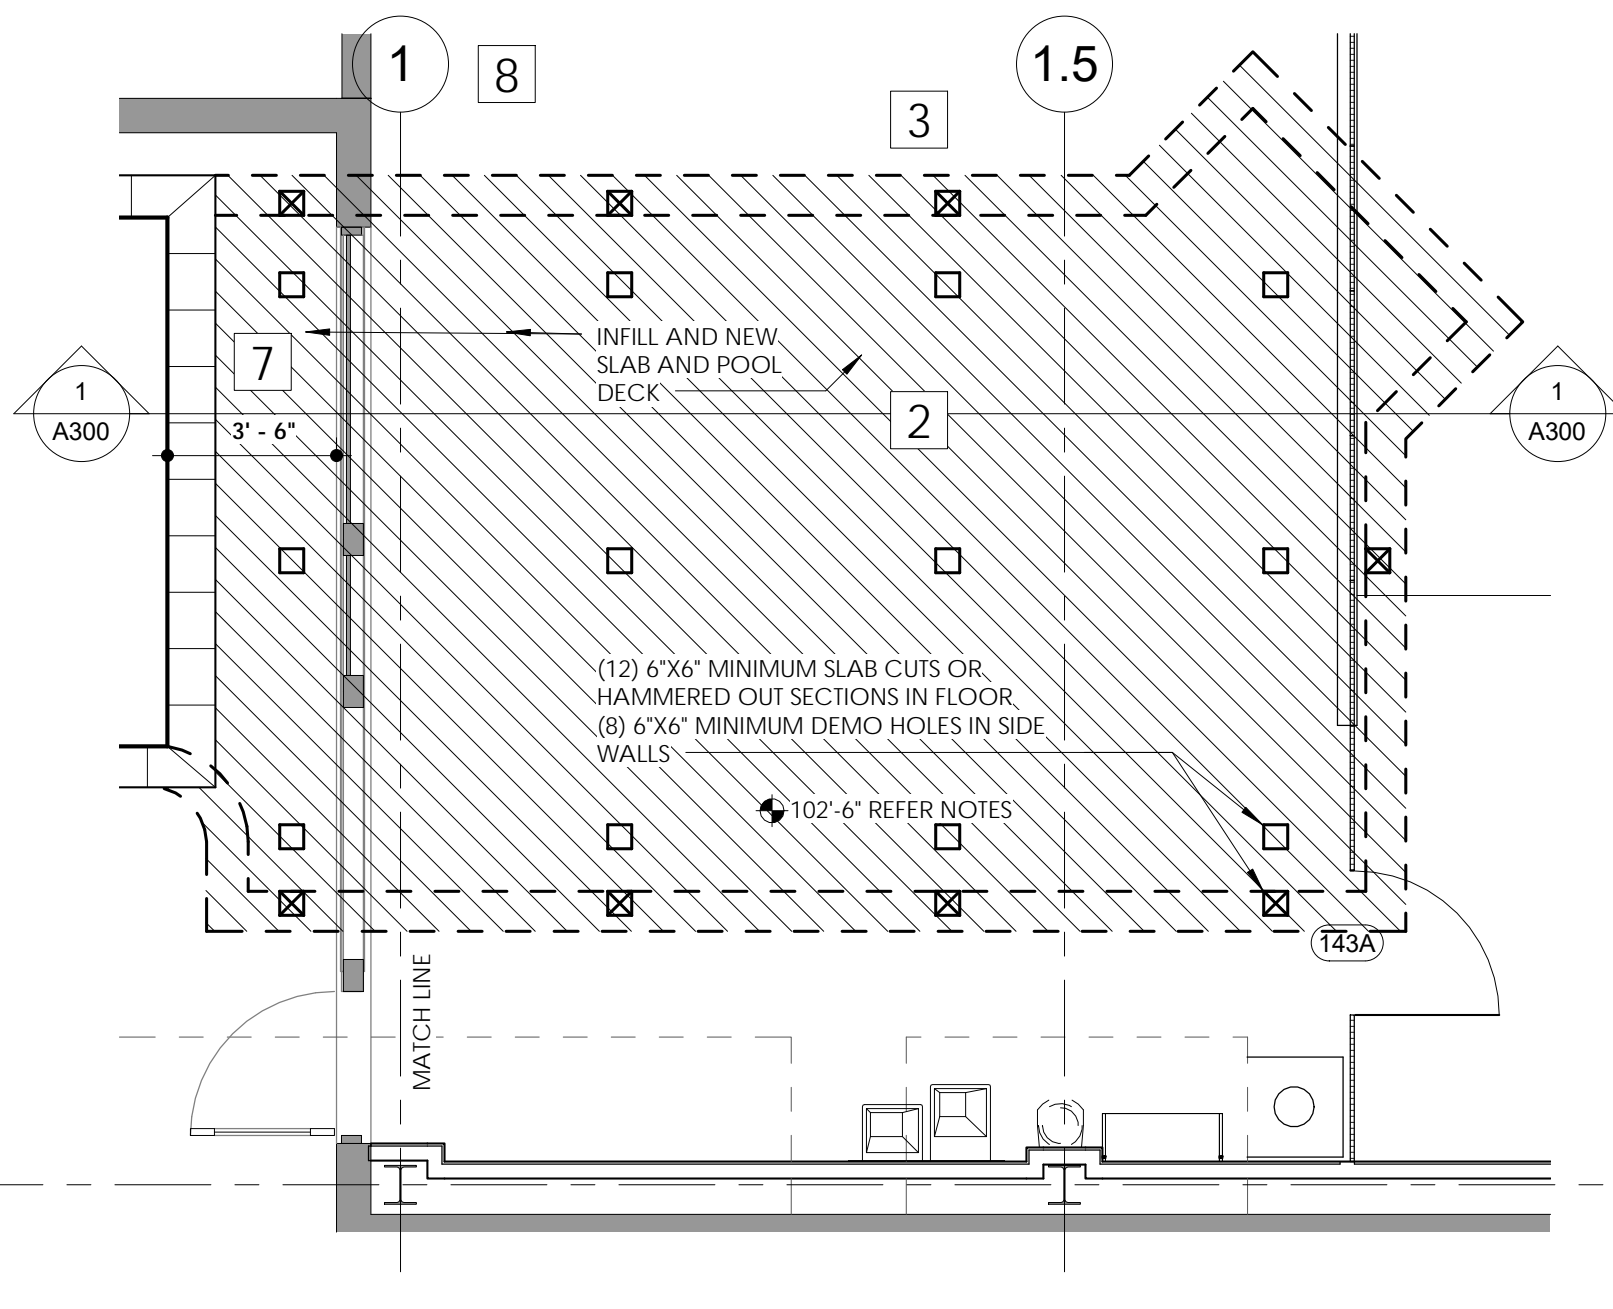

3 FLOOR PLAN @ POOL INFILL
1/4" = 1'-0"


- #### KEYED FLOOR PLAN NOTES
- 1 RELOCATE EXISTING DOOR INCLUDING HARDWARE MAG LOCK EXIT BUTTON AND CARD READER PATCH AND REPAIR WALL
 - 2 INFILL INTERIOR PORTION OF POOL AND SPA POUR NEW CONCRETE SLAB DOWN INTO EXISTING RE STRUCTURAL
 - 3 CAP PLUMBING PER CODE AND INFILL EXISTING SLOT DRAIN WITH CONCRETE AND APPLY FLOOR LEVELER TO ENTIRE EXISTING FLOOR USING PROPER SUBSTRATE PREPARATION PER ELEVATOR RECOMMENDATIONS TO BRING FINISHED FLOOR TO 102'-6" ELEVATION EXISTING FLOOR SLOPE TO SLOT DRAIN INDICATED AT 102'-6" ELEVATION ON EXISTING DRAWINGS
 - 4 INFILL FLOOR SLAB WITH REINFORCED CONCRETE DOWEL INTO EXISTING
 - 5 INSTALL NEW STORFRONT SYSTEM INSTAL HEAD FLASHING TRIMMATIO TRIM AND SEALANT AT EXISTING EFS PER MANUFACTURERS RECOMMENDATIONS
 - 6 NEW POOL EDGE RELOCATE EXISTING CONCRETE POOL PRECAST EDGE CAP AND CUT TO FIT REFER STRUCTURAL AND PLUMBING DRAWINGS
 - 7 ALL FITNESS EQUIPMENT AND BENCHES BY OWNER

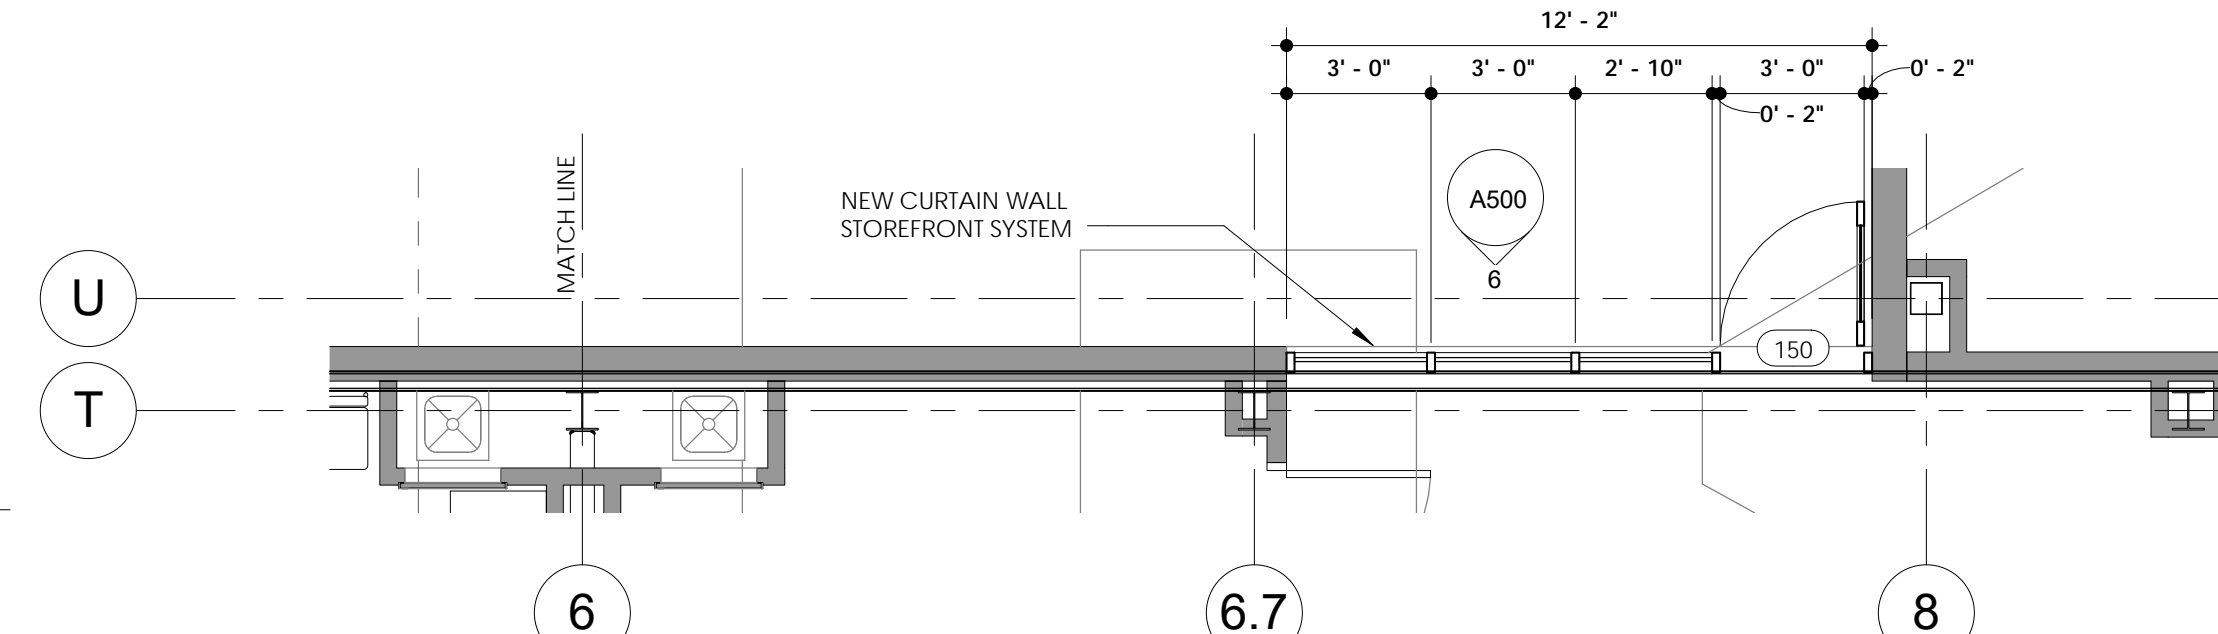


2 FLOOR PLAN @ NEW ENTRY NEAR ELEV. LOBBY
1/4" = 1'-0"

- #### GENERAL PLAN NOTES
- UNLESS INDICATED OTHERWISE, FLOOR PLAN DIMENSIONS ARE TO THE CENTER LINE OF NEW METAL STUD WALL CONSTRUCTION AND TO THE FINISHED FACE OF EXISTING CONSTRUCTION.
 - WHERE REQUIRED TO ENSURE WALL STABILITY, DIAGONALLY BRACE TOP-OF-WALL ABOVE CEILING AT 4'-0" ON CENTER AND EACH SIDE DOOR SECURED TO STRUCTURE ABOVE.
 - UNLESS INDICATED OTHERWISE, LOCATE HINGE SIDE OF DOOR OPENINGS 4" FROM FINISH FACE OF ADJACENT WALL.
 - FIELD VERIFY FINISHED CASEWORK OPENINGS PRIOR TO FABRICATION OF CASEWORK. NOTIFY THE ARCHITECT AND OBTAIN THE ARCHITECT'S DIRECTION SHALL VERIFIED CASEWORK OPENING REQUIRE DIMENSIONAL RECONFIGURATION OF THE CASEWORK INDICATED.
 - UNLESS INDICATED OTHERWISE, REFER TO REFLECTED CEILING PLANS FOR CEILING HEIGHT DESIGNATIONS.
 - PROVIDE AND INSTALL BLOCKING, FRAMING AND / OR BRACING AS REQUIRED TO SECURELY INSTALL ALL OWNER AND CONTRACTOR FURNISHED EQUIPMENT OR WALL PROTECTION ASSEMBLIES OR GRAB BARS OR TOILET ACCESSORIES. VERIFY BLOCKING IS INSTALLED IN EXISTING WALLS TO RECEIVE OWNER OR CONTRACTOR FURNISHED EQUIPMENT OR WALL PROTECTION ASSEMBLIES.
 - INSTALL PLUMBING AND ELECTRICAL FIXTURES AND DEVICES. MAKE CONNECTIONS TO EXISTING SYSTEM PER CODE REQUIREMENTS.
 - REFER 'A607' SERIES DRAWINGS FOR INTERIOR ELEVATIONS AND ADDITIONAL INFORMATION.
 - THE DRAWINGS AND SPECIFICATIONS, AND ALL COPIES THEREOF, ARE LEGAL INSTRUMENTS OF SERVICE FOR THE USE OF THE OWNER AND AUTHORIZED REPRESENTATIVES ON THE DESIGNATED PROPERTY ONLY. OTHER USE, WITHOUT THE EXPRESSED WRITTEN PERMISSION OF THE ARCHITECT OF RECORD, IS PROHIBITED.
 - SPECIFICATIONS, DETAILS AND SCHEDULES WHICH MAY BE BOUND SEPARATELY ARE PART OF THESE CONTRACT DOCUMENTS. DRAWINGS BY CONSULTING PROFESSIONALS, SUCH AS STRUCTURAL, LANDSCAPE, ETC. ARE SUPPLEMENTARY TO THE ARCHITECTURAL DRAWINGS AND ARE PART OF THESE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY OF ANY OMISSIONS OR DISCREPANCIES BETWEEN THE ARCHITECTURAL DRAWINGS, CONSULTING PROFESSIONALS DRAWINGS, SPECIFICATIONS OR EXISTING CONDITIONS. SHOULD THERE BE AN OMISSION OR DISCREPANCY BETWEEN SAID DRAWINGS, SPECIFICATIONS OR CONDITIONS, IT SHALL BE BROUGHT TO THE ARCHITECT'S ATTENTION IN WRITING FOR CLARIFICATION PRIOR TO INSTALLATION OF SAID WORK.
 - THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY IF NECESSARY INFORMATION IS NOT SHOWN OR UNCLEAR.
 - THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, ELEVATIONS AND EXISTING CONDITIONS PRIOR TO STARTING WORK AND REPORT ANY DISCREPANCIES IN WRITING TO THE ARCHITECT. ANY WORK INSTALLED IN CONFLICT WITH THE ARCHITECTURAL DRAWINGS SHALL BE CORRECTED AT THE CONTRACTORS EXPENSE.
 - THE CONTRACTOR SHALL BE RESPONSIBLE FOR SCHEDULING AND COORDINATING THE WORK FOR ALL UTILITIES AND SERVICES.
 - ALL SYMBOLS AND ABBREVIATIONS USED ON THE DRAWINGS ARE CONSIDERED TO BE CONSTRUCTION STANDARDS. QUESTIONS REGARDING THE SAME, OR THEIR EXACT MEANING, SHOULD BE DIRECTED TO THE ARCHITECT.
 - WRITTEN DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALE. DO NOT SCALE DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE ACCURATE PLACEMENT AND CONSTRUCTION OF THE BUILDING.
 - FLOOR ELEVATIONS ARE TO TOP OF CONCRETE OR MASONRY UNLESS NOTED OTHERWISE. INTERIOR WALL DIMENSIONS ARE TO CENTER LINE OF WALL UNLESS NOTED OTHERWISE.
 - CONTRACTOR SHALL PROVIDE AND INSTALL ALL STIFFENERS, BRACING, BLOCKING, BACKING, HANGERS, BACK-UP PLATES, AND SUPPORTING BRACKETS REQUIRED FOR THE INSTALLATION OF ALL CASEWORK, TOILET ROOM ACCESSORIES, FIXTURES, PARTITIONS AND ALL WALL-MOUNTED OR SUSPENDED MECHANICAL, KITCHEN, ELECTRICAL OR MISCELLANEOUS EQUIPMENT AND FURNISHINGS.
 - CONTRACTOR SHALL VERIFY EXACT SIZES AND LOCATIONS OF ALL MECHANICAL EQUIPMENT, BASE STRUCTURES, ROOF OPENINGS, AS WELL AS POWER, WATER, DRAIN INSTALLATIONS AND STRUCTURAL STEEL SUPPORT LOCATIONS WITH EQUIPMENT MANUFACTURERS BEFORE PROCEEDING WITH THE WORK. CHANGES TO ACCOMMODATE FIELD CONDITIONS OR APPROVED SUBSTITUTIONS SHALL BE MADE WITHOUT ADDITIONAL CHARGE TO THE OWNER.
 - CONTRACTOR TO PROVIDE TEMPORARY FIRE EXTINGUISHERS DURING CONSTRUCTION AS REQUIRED BY CODE. RELOCATE ANY EXISTING FIRE EXTINGUISHERS WITHIN PROJECT AREA LOCATION TIED BY ARCHITECT.
 - CONTRACTOR RESPONSIBLE FOR RUNNING TEMPORARY POWER TO CONSTRUCTION TRAILER AND MAKING CONNECTION AS AVAILABLE ON SITE AND DIRECTED BY OWNER.

NOTE: ALL WORK OUTSIDE OF EXISTING EXTERIOR FACE OF EXISTING EXTERIOR WALL, IS BEING PERFORMED CONCURRENTLY UNDER SEPARATE CONSTRUCTION DOCUMENTS


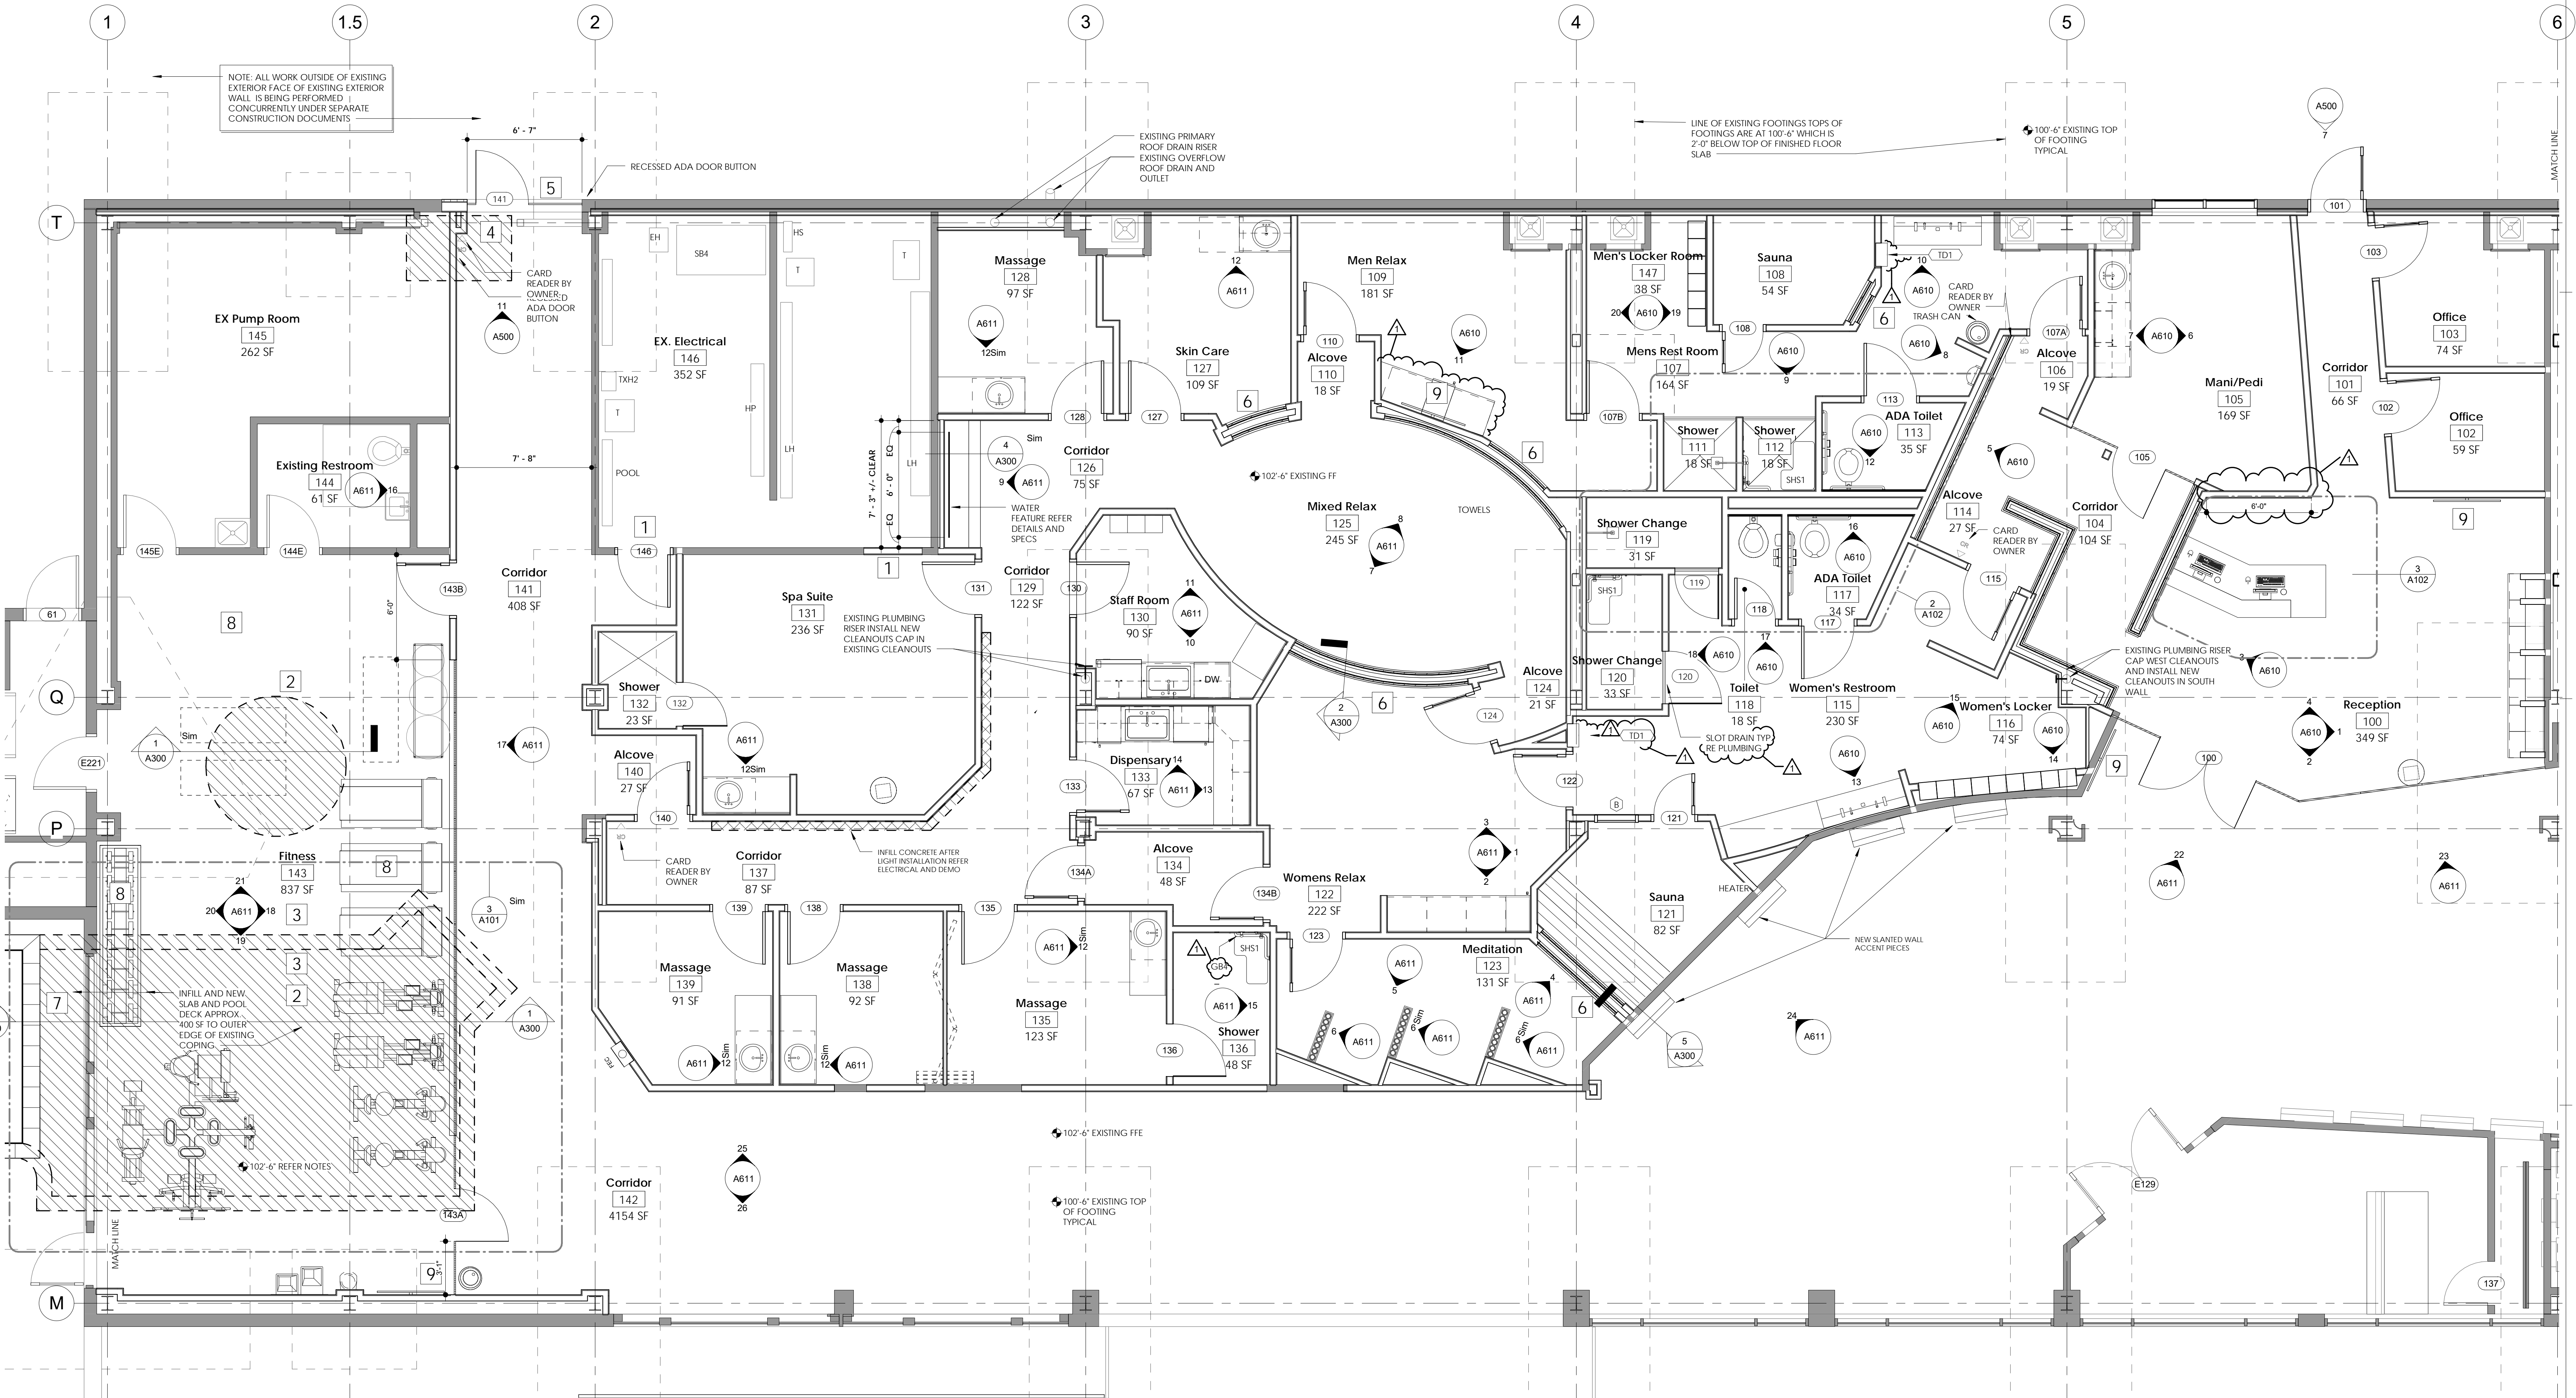


1 FLOOR PLAN
1/4" = 1'-0"



HARD ROCK SPA

CHEROKEE NATION ENTERTAINMENT, LLC
771 W. CHEROKEE ST. CATOOSA, OK 74115

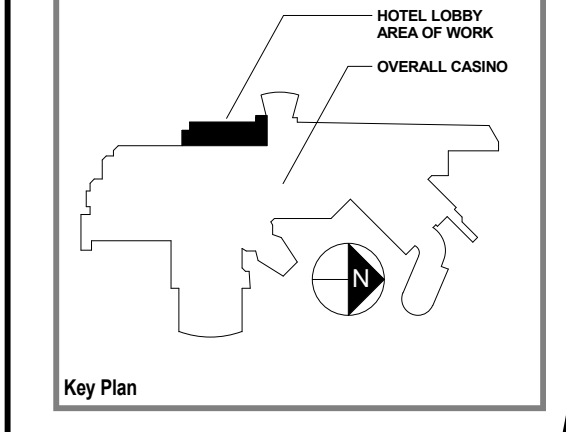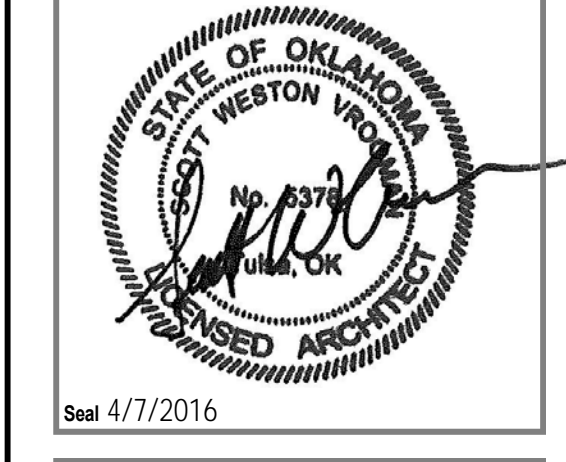

100% CONSTRUCTION DOCUMENTS

SHEET TITLE: FLOOR PLAN

DRAWN BY: Author
CHECKED BY: Checker
ISSUE DATE: 4/7/2016
A101