

HACN HOUSING REHAB SITE DIRECTIONS


Name: William Shinn

Telephone: (918)257-9011

Address: 3 SW 6th St
Afton, OK 74331

County: Ottawa **Year Built:**

GPS Coordinates: 36.2695035,-95.3401395 **Drive Time:** 77.3 miles, 1 hr 35 min

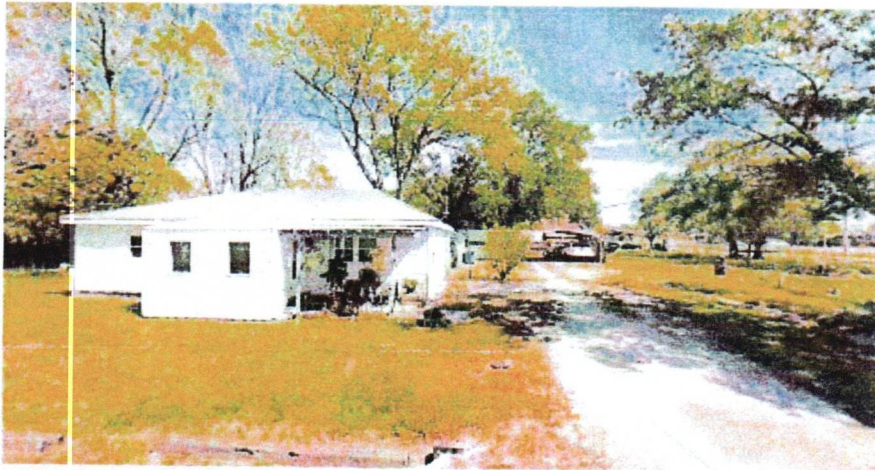

Directions: From Cherokee Nation, Head north on S Cotton Wood St towards Muskogee Ave 2 sec (26ft) Take Sate Hwy 82 N to E 240 Rd/EO240 Rd in Delaware County 1 hr 29 min (75.0mi) Turn right onto US-62/S muskogee Ave 0.6 mi At traffic circle, take the 2nd exit and stay on US-62/S Muskogee Ave 2.3 mi Turn right onto US-62 E 2.2 mi Continue to follow Hwy 82 N46.7 mi turn left to stay on State Hwy 82 N 15.7 mi Slight right to stay on State Hwy82 N 325 ft Turn right onto US-60 E/US-69 N 4.3 mi Keep left to continue on US-69 N 3.1 mi Continue on E 240 Rd/490 Rd/Eo240 Rd. Take S 510 Rd to 6th St in Afton 5 mi (2.3mi) Turn right onto E 240 Rd/40 Rd/E02240 Rd 1.0 mi Turn left at th 1st cross street onto S 510 Rd 1.0 mi Continue onto Ross Ave 253 ft Turn right onto 6th St destination will be on left _

Eric Cheater
Cost Estimator/Inspector

4/2/24
Date




Housing Authority of the Cherokee Nation
PO Box 1007,
Tahlequah, Oklahoma 74465-1007
918-456-5482 | 1-800-837-2869

Description	Quantity	Per
ESTIMATE: Structure (Housing Authority of the Cherokee Nation)		Claim #11086, William SHINN
Approved		

ROOFPLAN: Roofplan

Roof

Roof area: 1,803.26 SF **Squares:** 18.0 SQ **Soffit:** 299.10 SF
Eaves: 157.56 LF **Ridge:** 23.49 LF



1 Shingles, Laminated/Architectural Elite - Replace Includes 10% waste on material quantity.	18.04 (19.84)	SQ
2 Drip Edge (Rake + Eave) Galvanized - Replace Includes 5% waste on material quantity.	157.56 (165.44)	LF
3 Tear Off, Roof Covering 3 Additional Layers	18.04	SQ
4 Shingles, Starter Row, Continuous - Replace Includes 10% waste on material quantity.	157.56 (173.32)	LF
5 Ridge Cap Shingles, Fiberglass - Remove	112.49	LF
6 Ridge Cap Shingles, Fiberglass - Replace Includes 10% waste on material quantity.	112.49 (123.74)	LF
7 Dumpster 20 Yard	1	EA
8 Vent Pipe Flashing, Furnace Aluminum, 4" - Tear Out	1	EA
9 Vent Pipe Flashing, Furnace Aluminum, 4" - Replace	1	EA
10 Vent Cap, Furnace Aluminum, 4" - Tear Out	1	EA
11 Vent Cap, Furnace Aluminum, 4" - Replace	1	EA
12 Felt, 30LB - Replace	18.04	SQ
13 Flashing, Plumbing Vent Aluminum - Tear Out	2	EA
14 Flashing, Plumbing Vent Aluminum - Replace	2	EA
15 Roof Vent, Static, Box/Turtle, Aluminum - Replace	3	EA

Total bid: _____

Date: _____

Contractor
Signature: _____