




Housing Authority of the Cherokee Nation
 PO Box 1007,
 Tahlequah, Oklahoma 74465-1007
 918-456-5482 | 1-800-837-2869

Description	Quantity	Per
ESTIMATE: Roof (Housing Authority of the Cherokee Nation)	Claim #10175, Don Davis	
Approved		

ROOFPLAN: Roofplan

Roof, Roof 2, Roof 3, Roof 4


Roof area: 2,476.60 SF **Squares:** 24.8 SQ **Soffit:** 456.07 SF
Eaves: 111.50 LF **Ridge:** 40.67 LF




1 Ribbed Roofing, Steel, Up to 1", 26 Gauge, Colored - Tear Out	5.19	SQ
2 Ribbed Roofing, Steel, Up to 1", 26 Gauge, Colored - Replace Includes 10% waste on material quantity.	5.19 (5.71)	SQ
3 Eave Trim, Metal Roofing, 26 GA - Tear Out	51.75	LF
4 Eave Trim, Metal Roofing, 26 GA - Replace Includes 5% waste on material quantity.	51.75 (54.34)	LF
5 Rake Edge, Metal Roofing - Tear Out	20.06	LF
6 Rake Edge, Metal Roofing - Replace Includes 5% waste on material quantity.	20.06 (21.06)	LF
7 Roof Nailer, Batten, Horizontal - Remove	5.19	SQ
8 Ceiling Joists (SF) 2"x6" - 16" OC - Remove	519.17	SF
9 Roof Nailer, Batten, Horizontal - Replace Includes 5% waste on material quantity.	5.19 (5.45)	SQ
10 Ceiling Joists (SF) 2"x6" - 16" OC - Replace Includes 5% waste on material quantity.	519.17 (545.13)	SF
11 Ledger Board, Treated Pine 2"x8" - Replace Includes 5% waste on material quantity.	47.75 (50.14)	LF
12 Rim Joist, 2"x8" (LF) - Remove	67.60	LF
13 Rim Joist, 2"x8" (LF) - Replace Includes 10% waste on material quantity.	67.60 (74.36)	LF
14 Shingles, Laminated/Architectural Good - Tear Out	19.58	SQ
15 Shingles, Laminated/Architectural Good - Replace Includes 10% waste on material quantity.	19.58 (21.54)	SQ
16 Shingles, Starter Row, Continuous - Replace Includes 10% waste on material quantity.	59.75 (65.73)	LF
17 Felt, 30LB - Replace	19.58	SQ
18 Drip Edge (Rake Only) Aluminum, Pre-Finish Color - Tear Out	103.02	LF
19 Drip Edge (Rake Only) Aluminum, Pre-Finish Color - Replace Includes 5% waste on material quantity.	103.02 (108.17)	LF
20 Drip Edge (Gutter Apron) Aluminum, Pre-Finish Color, 5" - Tear Out	59.75	LF
21 Drip Edge (Gutter Apron) Aluminum, Pre-Finish Color, 5" - Replace Includes 5% waste on material quantity.	59.75 (62.73)	LF
22 Ridge Cap Shingles, Fiberglass, Laminated - Replace Includes 10% waste on material quantity.	40.67 (44.74)	LF
23 Roof Vent, Static, Box/Turtle, Aluminum - Tear Out	6	EA




Housing Authority of the Cherokee Nation
PO Box 1007,
Tahlequah, Oklahoma 74465-1007
918-456-5482 | 1-800-837-2869


Description	Quantity	Per
ESTIMATE: Roof (Housing Authority of the Cherokee Nation) Claim #10175, Don Davis		
 Approved		
24 Roof Vent, Static, Box/Turtle, Aluminum - Replace	6	EA _____
25 Roof Vent, Box/Turtle - Prime & Paint	6	EA _____
26 Flashing, Plumbing Vent Aluminum - Tear Out	3	EA _____
27 Flashing, Plumbing Vent Aluminum - Replace	3	EA _____
28 Flashing, Vent Pipe - Prime & Paint	3	EA _____
29 Dumpster 20 Yard	1	EA _____


Total: _____

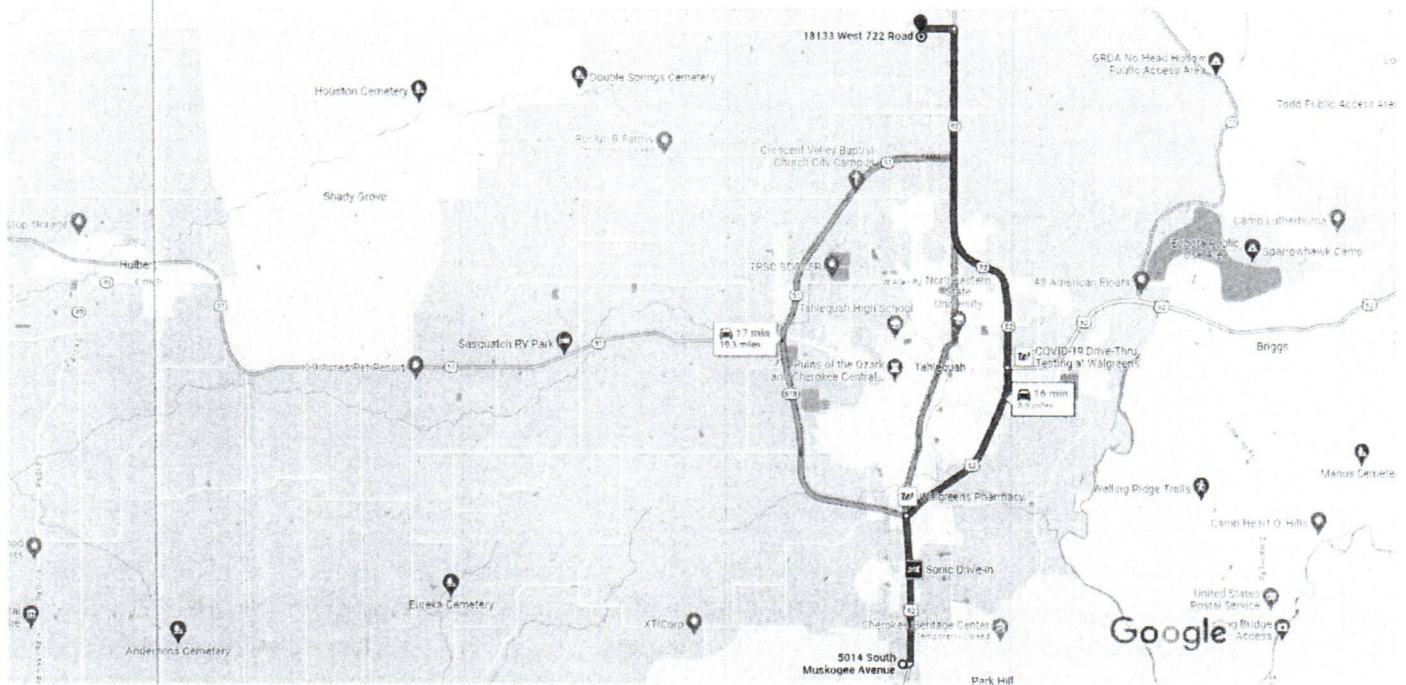

Map data ©2023 Google 1 mi

 **via US-62 E and State Hwy 82 N** 16 min
 Fastest route now due to traffic conditions 8.9 miles

 **via OK-51 W/OK-51BYP and OK-51 Spur** 17 min
 10.3 miles

 **via S Muskogee Ave and N Grand Ave** 20 min
 8.3 miles

Explore nearby 18133 W 722 Rd

Restaurants Hotels Gas stations Parking Lots More