

HACN HOUSING REHAB SITE DIRECTIONS


Name: Anthony Graham

Telephone: (918)313-7575

Address: 1610 W Center St
Collinsville, OK 74021

GPS Coordinates: 36.36370 95.84494

Drive Time:

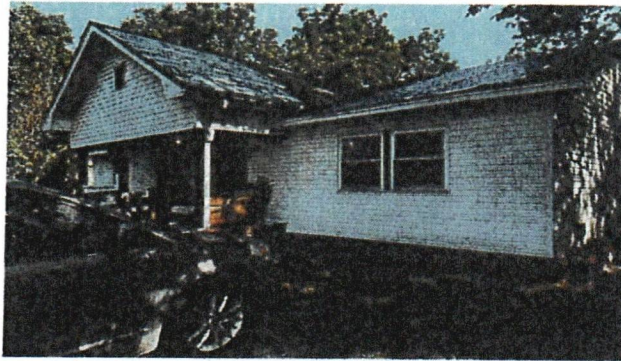

Directions: From Cherokee Nation, Continue on US-412 W. Take US-169 N to OK-20 W in Collinsville. Take the OK-20 W exit from US-169 N 48 min (54.2 mi) Merge onto US-412 W/Cherokee Turnpike Continue to follow US-412 W Toll road 32.9 mi Continue onto I-44/US-412 W 4.6 mi Use the right 2 lanes to turn slightly right onto I-244 W/US-412 W (signs for Sand Springs/Enid) 2.1 mi Take exit 13C to merge onto US-169 N toward Owasso/Nowata 14.4 mi Take the OK-20 W exit toward Collinsville 0.3 mi Follow OK-20 W to W Center St 5 min (1.4 mi) 1610 W Center St Collinsville, OK 74021

Ray Gpson 918-883-5850
Cost Estimator/Inspector

 8-19-2025
Date

WorkWrite-Up and Bid Document/By Trade

Anthony Graham

1610 W Center St Collinsville, OK 7-4021

(918) 313-7575

Contractor Name:

Contractor Signature:

This document must be signed to be a valid bid.

PROJECT TYPE: Rehabilitation

Bid Due Date:

Trade	Work Description / Comments	Gen. Spec.	Qty Unit	Item Bid
Roofing				
1 Area: ROOF	Replace Shingles / Install Heritage/30 Yr Warranty, Fiberglass shingles/Use Marlarky/Tamko or approved equal. 30 lb Felt, Painted Style D Drip Edge, Pipe Flashing, Valley Flashing, Step Flashing & Slant Back Attic vents.	Div.# 7.A.	25 Sq	
2 Area: ROOF	Roofing/Strip/Asphalt-Fiberglass. Remove all layers, and haul roofing debris to a Legal Waste Dump for disposal.	Div.# 7.C	25 Sq	
3 Area: ROOF	Sheathing/7/16" OSB/Replace. Replace existing sheathing/Use 7/16" OSB Where needed.	Div.# 7.A	160 SF	

Trade	Work Description / Comments	Gen. Spec.	Qty Unit	Item Bid
-------	-----------------------------	------------	----------	----------

All construction shall be in accordance with local codes, manufacturers' recommended installation procedures, good quality workmanship practices, General Specifications and Lead-Based Paint requirements when applicable. Conflicts between requirements will be resolved by compliance with the more stringent requirement. Contractor awarded the job will be responsible for conducting safe work practices that comply with OSHA Construction Standards for Asbestos Workers. Asbestos report, where required, will be attached if areas tested are 1% or greater. See attached Asbestos Sampling Report for location and testing of Planned Work Activities.

Total: