


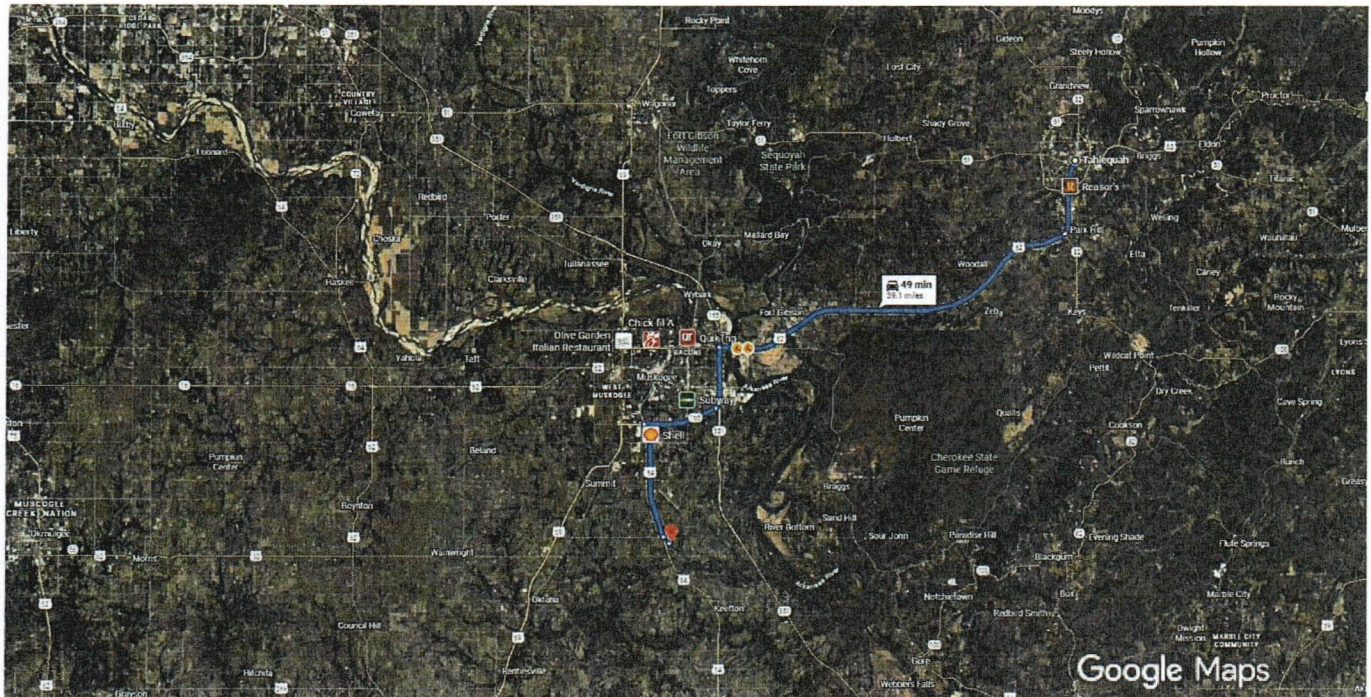

Imagery ©2025, Map data ©2025 Google 2 mi

Tahlequah
Oklahoma 74464

Take US-62 W and US-64 E to E 93rd St S/E0960 in
Muskogee County

47 min (38.4 mi)

- ↑ 1. Head south on S Muskogee Ave toward W Shawnee St
 ⓘ Pass by BancFirst (on the right in 0.2 mi)
 4.0 mi
- ↗ 2. Use any lane to turn slightly right toward US-62 W
 328 ft
- ↗ 3. Merge onto US-62 W
 20.6 mi
- ↗ 4. Use the right lane to merge onto OK-165 S/OK-351 via the ramp to Ft Smith
 3.2 mi
- ↘ 5. Take the OK-165 W/Peak Blvd exit toward US-64
 0.3 mi
- ↑ 6. Continue onto OK-165 W/E Peak Blvd
 4.0 mi
- ↗ 7. Turn left onto the ramp to Ft. Smith

↗ 8. Continue onto US-64 E 0.3 mi

6.0 mi

Continue on E 93rd St S/E0960 to your destination

2 min (0.7 mi)

↶ 9. Turn left onto E 93rd St S/E0960

0.3 mi

↗ 10. Turn right at the 1st cross street onto S 13th St
E

0.3 mi

↶ 11. Turn left

i Destination will be on the left

482 ft

9610 S 13th St E

Muskogee, OK 74403



Housing Authority of the Cherokee Nation
PO Box 1007,
Tahlequah, Oklahoma 74465-1007
918-456-5482 | 1-800-837-2869

Description	Quantity	Per
ESTIMATE: Emergency (Housing Authority of the Cherokee Nation)		Claim #11633, Norman Scott
Approved		
FLOORPLAN: Floorplan		

Water Heater

1 Water Heater, Electric 50 Gallon, Lifetime Warranty - Remove	1	EA	_____
2 Water Heater, Electric 50 Gallon, Lifetime Warranty - Replace	1	EA	_____
3 Trucking & Hauling, 1/2 Ton	1	LD	_____

Toilet

4 Plumbing Fixtures, Remove & Bag Toilet	1	EA	_____
5 Toilet, Handicap Excellent - Replace	1	EA	_____

Master Bathroom

Length: 11'5" **Width:** 4'5" **Height:** 8' Flat
Walls: 253.32 SF **Walls-subs:** 233.32 SF **Walls-subs-cas-bsbd:** 220.21 SF
Doors: 20.00 SF **Windows:** 0.00 SF **Openings:** 0.00 SF **Missing Walls:** 0.00 SF
Floor: 50.42 SF **Ceiling:** 50.42 SF **Perim (F):** 28.10 LF **Perim (C):** 31.68 LF



6 Plumbing Fixtures, Remove & Bag Toilet	1	EA	_____
7 Toilet, Handicap Excellent - Replace	1	EA	_____
8 Plumbing Fixtures, Remove & Bag Bathtub Surround, Fiberglass	1	EA	_____
9 Shower Stall, Fiberglass Very Good - Replace	1	EA	_____
Install low curb handicap shower. Include handicap seat.			
10 Faucet & Showerhead Single Valve, Good - Remove	1	EA	_____
11 Faucet & Showerhead Single Valve, Good - Replace	1	EA	_____
Install hand held shower faucet with rail.			
12 Grab Bar, Handicap, per LF - Replace	8.00	LF	_____
Install four 2' grab bars.			
13 Interior Door, Pre-hung, Masonite, HC, 6 Panel - Remove	1	EA	_____
14 Interior Door, Pre-hung, Masonite, HC, 6 Panel - Replace	1	EA	_____
Widen rough opening to accept 36" door.			
Paint/finish included in installation			
15 Lockset, Interior, Privacy, Excellent - Replace	1	EA	_____
16 Drywall/Plaster Ceiling - Prime & Paint	50.42	SF	_____
17 Drywall/Plaster Wall - Prime & Paint	220.21	SF	_____
18 Casing, Paint Grade, Up to 3" - Remove	35.00	LF	_____
19 Casing, Paint Grade, Up to 3" - Replace	35.00 (37.10)	LF	_____
Includes 6% waste on material quantity.			
Paint/finish included in installation			

Total: \$ _____

Date: _____

Contractor
Signature: _____