


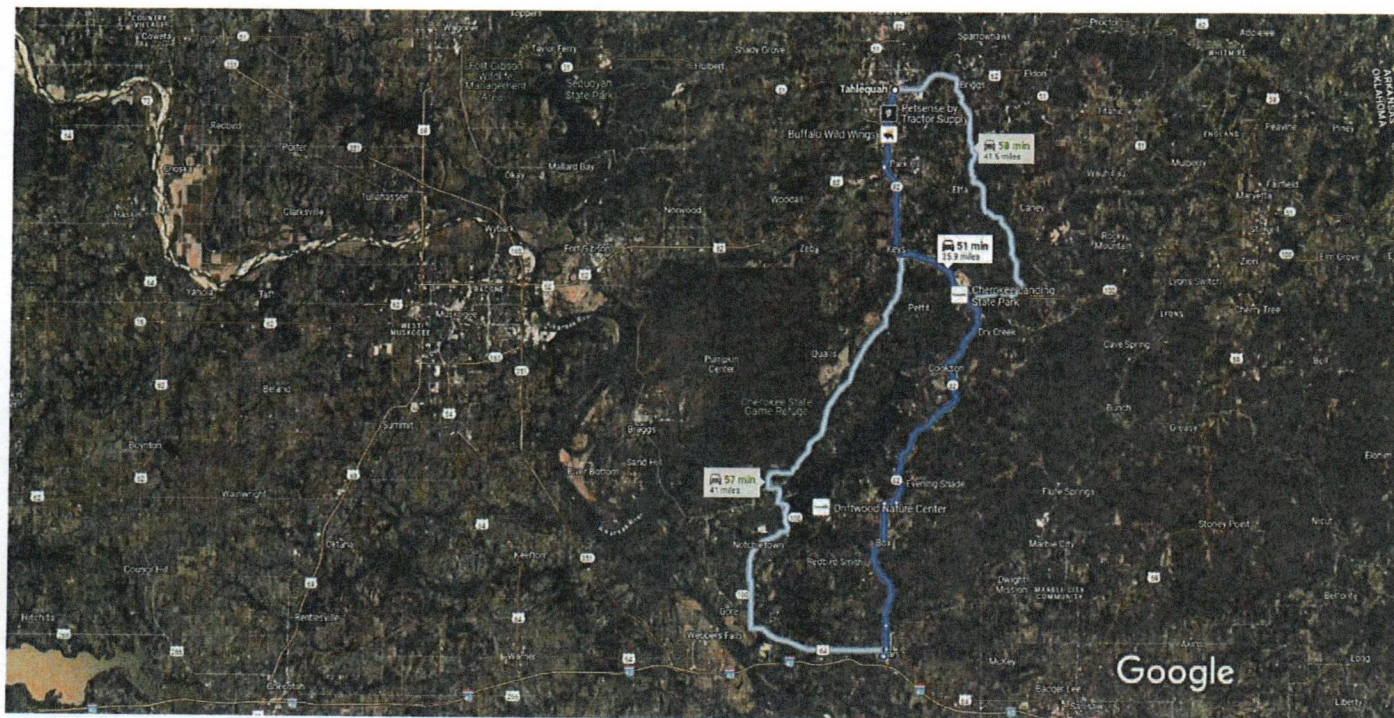

Map data ©2025, Map data ©2025 Google 2 mi

Tahlequah
Oklahoma 74464

Continue to Sequoyah County

- ↑ 1. Head south on S Muskogee Ave toward W Shawnee St
 37 min (27.2 mi)
 ⓘ Pass by BancFirst (on the right in 0.2 mi)
- ↩ 2. Keep left to continue on US-62 W
 4.0 mi
- ⤿ 3. At the traffic circle, take the 2nd exit onto State Hwy 82
 223 ft
- ↪ 4. Turn right onto OK-100 W/State Hwy 82 S
 22.5 mi
 0.6 mi

Continue on State Hwy 82 S. Drive to Bonham St in Vian

- ↩ 5. Turn left onto State Hwy 82 S
 11 min (8.7 mi)
- ↪ 6. Turn right onto Old State Hwy 82/N Rodgers St
 7.0 mi
 1.2 mi

↑ 7. Continue onto N Rogers St

0.4 mi

↪ 8. Turn right onto Hunter St

387 ft

↩ 9. Turn left onto Bonham St

 Destination will be on the right

299 ft

503 Bonham St

Vian, OK 74962



Housing Authority of the Cherokee Nation
PO Box 1007,
Tahlequah, Oklahoma 74465-1007
918-456-5482 | 1-800-837-2869

Description	Quantity	Per
ESTIMATE: Emergency (Housing Authority of the Cherokee Nation)		Claim #11679, Connie Young
Approved		
FLOORPLAN: Floorplan		

General Items

1 A/C Refrigerant Lines - Replace	30.00	LF	
2 Air Conditioning Condenser Pad, Large - Replace	1	EA	
3 Duct, Flexible Metalized Polyester (MH) 10" Diameter - Replace	87.00 (91.35)	LF	
Includes 5% waste on material quantity.			
clean duct work before installing new unite			
4 Duct, Flexible Metalized Polyester (MH) 8" Diameter - Replace	15.00 (15.75)	LF	
Includes 5% waste on material quantity.			
make sure to measure the duct work to get to proper amount this just an estimate			
make sure to make a site visit			
add two vents and duct work to inclosed room			
5 Thermostat, Excellent - Replace	1	EA	
6 Electrical Service 200 AMP - Replace	1	EA	
7 Electrical Service 200 AMP - Tear Out	1	EA	
8 A/C Disconnect Box - Replace	1	EA	
9 Central Air System 3 Ton - Replace	1	EA	
replace unite to the proper size to the sqft to house			
10 Trucking & Hauling, 1/2 Ton	1	LD	
11 Register, Heat 8" X 6" - Replace	7	EA	
12 Grill, Air Return 14" X 6" - Replace	1	EA	
replace a 25x14			

Total: \$

Date:

Contractor

Signature: