

HACN HOUSING REHAB SITE DIRECTIONS

Name: Edward Dawes


Telephone: (918)906-2271

Address: 400740 W. 4000 Rd
Collinsville, OK 74021

County: Washington

Year Built: 1979

GPS Coordinates: 36.44033,-95.87122 **Drive Time:** One hour 30 minutes

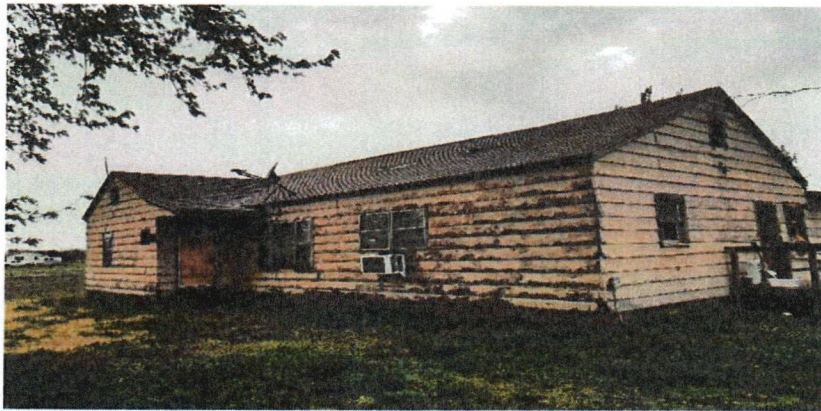

Directions: From Cherokee Nation, HWY 62 to Muskogee Turnpike, Turnpike to HWY 169 North to W. 4000 rd west to 400740 on North side of road

Michael Knapp
Cost Estimator/Inspector

4/3/2025
Date




Housing Authority of the Cherokee Nation
PO Box 1007,
Tahlequah, Oklahoma 74465-1007
918-456-5482 | 1-800-837-2869

Description	Quantity	Per
ESTIMATE: Roof (Housing Authority of the Cherokee Nation)		Claim #11577, Edward Dawes
Approved		

ROOFPLAN: Roofplan

Roof, Roof 2

Roof area: 1,849.49 SF **Squares:** 18.5 SQ **Soffit:** 349.97 SF
Eaves: 109.00 LF **Ridge:** 64.77 LF



1 Shingles, Composition, 3-Tab, 30 Year - Tear Out	16.34	SQ	_____
2 Shingles, Composition, 3-Tab, 30 Year - Replace Includes 10% waste on material quantity.	16.34 (17.97)	SQ	_____
3 Shingles, Starter Row, Continuous - Replace Includes 10% waste on material quantity.	89.00 (97.90)	LF	_____
4 Ridge Cap Shingles, 3-Tab - Replace Includes 10% waste on material quantity.	50.00 (55.00)	LF	_____
5 Steep Roof Charge, Asphalt Shingle Roof, 7/12-9/12 - Tear Out	16.34	SQ	_____
6 Steep Roof Charge, Asphalt Shingle Roof, 7/12-9/12 - Replace	16.34	SQ	_____
UNDERLAYMENTS			
7 Felt, Single Layer, 15 lb. - Replace	16.34	SQ	_____
VENTS AND FLASHINGS			
8 Drip Edge, Rake, Aluminum, Pre-Finished Color - Tear Out	69.48	LF	_____
9 Drip Edge, Rake, Aluminum, Pre-Finished Color - Replace Includes 5% waste on material quantity.	69.48 (72.95)	LF	_____
10 Roof Vent, Static, Box/Turtle, Aluminum - Replace	4	EA	_____
GUTTERS / DOWNSPOUTS / FASCIA			
11 Fascia, Cedar, 1"x8" - Tear Out	158.48	LF	_____
12 Fascia, Cedar, 1"x8" - Replace Includes 5% waste on material quantity.	158.48 (166.40)	LF	_____
13 Fascia, 6" and Over - Prime & Paint	158.48	LF	_____
DEBRIS REMOVAL			
14 Dumpster 10 Yard	4	EA	_____

Total: \$ _____

Date: _____

Signature: _____