



## HACN HOUSING REHAB SITE DIRECTIONS

**Participant:** Gary Byrd

**Telephone: Home:** (918) 316-1445

**Business:** \_\_\_\_\_

**Mobile** (918) 316-5991

**Address:** 92790 S. 4676 Rd.  
Bunch OK 74931

**County:** Adair

**Year Built:** 1967

**GPS Coordinates:** 35.67168, -94.69838

**Directions:** From Cherokee Nation, Take hwy 82 south to hwy 100. Go to Stilwell and turn south on hwy 59. Go about 7 miles to 903 rd./ Greasy School Rd. and turn right. Go about 1.7 miles to S. 4676 road and turn left. 2.2 miles house is on the right.

David Keys

**Cost Estimator/Inspector**


06/11/2025

**Date**

5014 S Muskogee Ave, Tahlequah, Ok Drive 38.7 miles, 45 min  
74464 to 92790 S 4676 Rd, Sallisaw, OK 74955

Google Maps

Gary Byrd

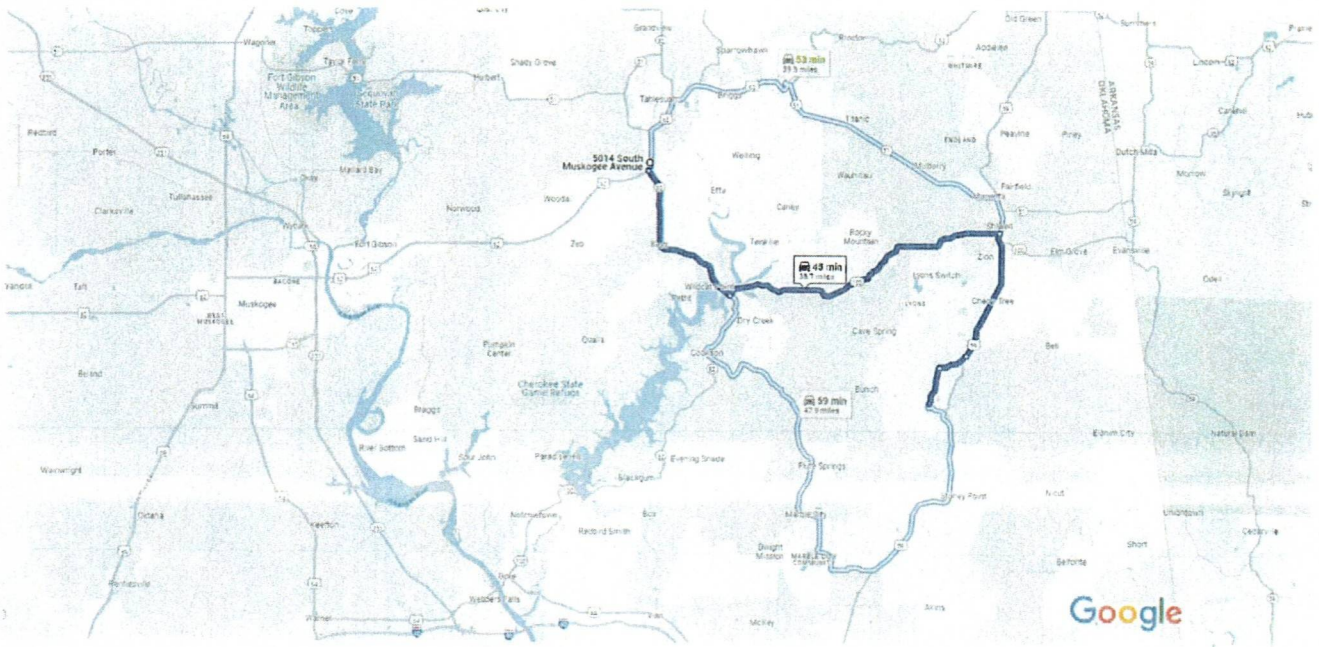

Map data ©2025 Google 2 mi

5014 S Muskogee Ave  
Tahlequah, OK 74464

Continue to US-62 W

- ↑ 1. Head east 55 sec (0.2 mi)
- ↪ 2. Turn right toward US-62 W 404 ft
- ↩ 3. Turn left toward US-62 W 446 ft
- 72 ft

Take State Hwy 82 and OK-100 E to E 903 Rd/Greasy  
School Rd in Adair County

- ↪ 4. Turn right onto US-62 W 39 min (34.6 mi)
- 0.4 mi
- 🔄 5. At the traffic circle, take the 2nd exit onto State Hwy 82 9.6 mi

↶ 6. Turn left onto OK-100

ⓘ Pass by McDonald's (on the left in 17.1 mi)

---

17.2 mi

↷ 7. Turn right onto US-59 S

7.4 mi

Drive to S 4676 Rd/D4676 Rd in Greasy

5 min (3.9 mi)

↷ 8. Turn right onto E 903 Rd/Greasy School Rd

ⓘ Continue to follow E 903 Rd

1.7 mi

↶ 9. Turn left onto S 4676 Rd/D4676 Rd

ⓘ Destination will be on the right

2.2 mi

92790 S 4676 Rd

Sallisaw, OK 74955

## Gary Byrd Break Down

Lines 1-28 \_\_\_\_\_

Lines 29-41 \_\_\_\_\_

Lines 42-45 \_\_\_\_\_

Line 46-49 \_\_\_\_\_

Lines 50-53 \_\_\_\_\_

Lines 54-61 \_\_\_\_\_

Lines 62-67 \_\_\_\_\_

Lines 68-71 \_\_\_\_\_

Lines 72-79 \_\_\_\_\_

Lines 80-86 \_\_\_\_\_

Lines 87-93 \_\_\_\_\_

Lines 94-95 \_\_\_\_\_

Total \_\_\_\_\_

Date \_\_\_\_\_

Contractor Signature \_\_\_\_\_



Housing Authority of the Cherokee Nation  
PO Box 1007,  
Tahlequah, Oklahoma 74465-1007  
918-456-5482 | 1-800-837-2869

| Description                                                                                                                                                                       | Quantity        | Per |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----|
| ESTIMATE: Rehab (Housing Authority of the Cherokee Nation)                                                                                                                        |                 |     |
| Claim #10332, Gary Byrd                                                                                                                                                           |                 |     |
| Approved                                                                                                                                                                          |                 |     |
| ROOFPLAN: Roofplan                                                                                                                                                                |                 |     |
| Roof, Roof 2, Roof 3                                                                                                                                                              |                 |     |
| <p>Roof area: 1,786.02 SF    Squares: 17.9 SQ    Soffit: 318.27 SF</p> <p>Eaves: 128.00 LF    Ridge: 66.00 LF</p>                                                                 |                 |     |
| 1 Siding - Prime & Paint                                                                                                                                                          | 905.22          | SF  |
| 2 Trim, Corner, Exterior - Prime & Paint                                                                                                                                          | 32.00           | LF  |
| 3 Caulking, Exterior, per SF                                                                                                                                                      | 158.11 (166.02) | SF  |
| Includes 5% waste on material quantity.                                                                                                                                           |                 |     |
| 4 Paint, 1 Coat - Siding, Gable ends                                                                                                                                              | 200.00          | SF  |
| 5 Pest Treatment                                                                                                                                                                  | 316.22          | SF  |
| 6 Shower Stall, Double Fiberglass, Elite Shower with Grab Bars, Adjustable Glide Bar and Seat. Handicap Approved - Replace                                                        | 1               | EA  |
| 7 Valve, Water Shutoff Angle 1/2" - Replace                                                                                                                                       | 3               | EA  |
| 8 Valve, Water Shutoff Straight 1/2" - Replace                                                                                                                                    | 2               | EA  |
| 9 Replace - Faucet & Removable Shower head Attached to Adjustable Glide Bar Single Valve, Excellent Anti-Scald Handicap Approved                                                  | 1               | EA  |
| 10 Faucet, Sink, Single Valve, Excellent - Replace                                                                                                                                | 1               | EA  |
| 11 Toilet, Handicap Excellent - Replace                                                                                                                                           | 1               | EA  |
| 12 Grab Bar L-Shape, 1" Dia. - Replace                                                                                                                                            | 1               | EA  |
| 13 Grab Bar Straight, 24"L, 1" DIA. - Replace                                                                                                                                     | 2               | EA  |
| 14 Hose Bib Outside Bathroom Wall - Replace                                                                                                                                       | 1               | EA  |
| Outside faucet that is threaded to receive a hose. Includes hose bib (sill cock), teflon tape, connection to supply line up to 10' and installation labor. Outside Bathroom Wall. |                 |     |
| 15 Sink, Wall Hung Elite - Replace                                                                                                                                                | 1               | EA  |
| 16 Cabinet, Broom, Excellent - Replace                                                                                                                                            | 1               | EA  |
| 17 P-Trap & Fittings, Sink - Replace                                                                                                                                              | 1               | EA  |
| 18 Drain, Sink - Replace                                                                                                                                                          | 1               | EA  |
| 19 Floor Tile, Vinyl Good - Replace                                                                                                                                               | 316.22 (347.84) | SF  |
| Includes 10% waste on material quantity.                                                                                                                                          |                 |     |
| 20 Caulk Bathtub/Shower Unit - Replace                                                                                                                                            | 64.00 (67.20)   | LF  |
| Includes 5% waste on material quantity.                                                                                                                                           |                 |     |
| 21 Base Molding, Caulking                                                                                                                                                         | 23.00 (24.15)   | LF  |
| Includes 5% waste on material quantity.                                                                                                                                           |                 |     |
| 22 Medicine Cabinet Excellent - Replace                                                                                                                                           | 1               | EA  |
| 23 Drywall/Plaster Ceiling - Paint, 1 Coat                                                                                                                                        | 400.00          | SF  |
| 24 Drywall/Plaster Wall - Paint, 1 Coat                                                                                                                                           | 316.22          | SF  |
| 25 Floor Prep, Vinyl Composition Tile, Rough                                                                                                                                      | 316.22          | SF  |
| 26 Flooring, Remove & Bag Vinyl Tile                                                                                                                                              | 316.22          | SF  |
| 27 Clean, Strip & Wax Vinyl Composition Floor Tile                                                                                                                                | 316.22          | SF  |



Housing Authority of the Cherokee Nation  
PO Box 1007,  
Tahlequah, Oklahoma 74465-1007  
918-456-5482 | 1-800-837-2869

| Description                                                       | Quantity | Per                            |
|-------------------------------------------------------------------|----------|--------------------------------|
| <b>ESTIMATE: Rehab (Housing Authority of the Cherokee Nation)</b> |          | <b>Claim #10332, Gary Byrd</b> |
| Approved                                                          |          |                                |
| 28 Exhaust Fan Good - Replace                                     | 1        | EA                             |

## FLOORPLAN: Floorplan

### Family Room


**Length:** 13'2"      **Width:** 22'      **Height:** 8' Flat  
**Walls:** 562.66 SF      **Walls-sub:** 482.66 SF      **Walls-sub-cas-bsbd:** 454.12 SF  
**Doors:** 20.00 SF      **Windows:** 20.00 SF      **Openings:** 40.00 SF      **Missing Walls:** 0.00 SF  
**Floor:** 289.67 SF      **Ceiling:** 289.67 SF      **Perim (F):** 61.76 LF      **Perim (C):** 65.34 LF



|                                                                  |                 |    |
|------------------------------------------------------------------|-----------------|----|
| 29 Drywall/Plaster Ceiling - Paint, 1 Coat                       | 289.67          | SF |
| 30 Drywall/Plaster Wall - Paint, 1 Coat                          | 454.12          | SF |
| 31 Clean, Strip & Wax Vinyl Composition Floor Tile               | 289.67          | SF |
| 32 Floor Leveler, Cement Based Medium                            | 40.00 (44.00)   | SF |
| Includes 10% waste on material quantity.                         |                 |    |
| 33 Base Molding, Paint Grade, Up to 3" - Replace                 | 61.76 (65.47)   | LF |
| Includes 6% waste on material quantity.                          |                 |    |
| 34 Floor Tile, Vinyl Economy - Replace                           | 289.67 (318.64) | SF |
| Includes 10% waste on material quantity.                         |                 |    |
| 35 Carpet Transition Strip, Wood - Replace                       | 8.00            | LF |
| 36 Drywall/Plaster Wall - Paint, 2 Coats                         | 454.12          | SF |
| 37 Concrete Epoxy Injection                                      | 18.42 (19.34)   | LF |
| Includes 5% waste on material quantity.                          |                 |    |
| 38 Door, Entry, Prehung, Panel, Steel Very Good - Replace        | 1               | EA |
| 39 Door, Entry, Panel - Prime & Paint                            | 2               | EA |
| 40 Door, Storm/Screen, Aluminum/Vinyl, Good - Replace            | 1               | EA |
| 41 Ceiling Fan, Energy Star Compliant Wood Finish, 52" - Replace | 1               | EA |

### Room

**Length:** 2'10"      **Width:** 4'4"      **Height:** 8' Flat  
**Walls:** 114.68 SF      **Walls-sub:** 99.68 SF      **Walls-sub-cas-bsbd:** 77.07 SF  
**Doors:** 15.00 SF      **Windows:** 0.00 SF      **Openings:** 0.00 SF      **Missing Walls:** 0.00 SF  
**Floor:** 12.28 SF      **Ceiling:** 12.28 SF      **Perim (F):** 11.61 LF      **Perim (C):** 14.32 LF



|                                                    |       |    |
|----------------------------------------------------|-------|----|
| 42 Drywall/Plaster Ceiling - Paint, 1 Coat         | 12.28 | SF |
| 43 Drywall/Plaster Wall - Paint, 1 Coat            | 77.07 | SF |
| 44 Clean, Strip & Wax Vinyl Composition Floor Tile | 4.95  | SF |
| 45 Drywall/Plaster Wall - Paint, 2 Coats           | 77.07 | SF |




Housing Authority of the Cherokee Nation  
PO Box 1007,  
Tahlequah, Oklahoma 74465-1007  
918-456-5482 | 1-800-837-2869

| Description                                                       | Quantity | Per |
|-------------------------------------------------------------------|----------|-----|
| <b>ESTIMATE: Rehab (Housing Authority of the Cherokee Nation)</b> |          |     |
| Claim #10332, Gary Byrd                                           |          |     |
| Approved                                                          |          |     |

 **bathroom**


**Length:** 10'      **Width:** 9'8"      **Height:** 8' Flat  
**Walls:** 314.66 SF      **Walls-sub:** 286.66 SF      **Walls-sub-cas-bsbd:** 207.00 SF  
**Doors:** 20.00 SF      **Windows:** 8.00 SF      **Openings:** 0.00 SF      **Missing Walls:** 0.00 SF  
**Floor:** 81.89 SF      **Ceiling:** 81.89 SF      **Perim (F):** 35.76 LF      **Perim (C):** 39.34 LF



|                                                    |        |    |
|----------------------------------------------------|--------|----|
| 46 Drywall/Plaster Ceiling - Paint, 1 Coat         | 81.89  | SF |
| 47 Drywall/Plaster Wall - Paint, 1 Coat            | 207.00 | SF |
| 48 Clean, Strip & Wax Vinyl Composition Floor Tile | 48.89  | SF |
| 49 Drywall/Plaster Wall - Paint, 2 Coats           | 207.00 | SF |

 **bedroom 2**


**Length:** 11'      **Width:** 10'      **Height:** 8' Flat  
**Walls:** 336.00 SF      **Walls-sub:** 295.33 SF      **Walls-sub-cas-bsbd:** 270.55 SF  
**Doors:** 16.67 SF      **Windows:** 24.00 SF      **Openings:** 0.00 SF      **Missing Walls:** 0.00 SF  
**Floor:** 110.00 SF      **Ceiling:** 110.00 SF      **Perim (F):** 38.95 LF      **Perim (C):** 42.00 LF



|                                                    |        |    |
|----------------------------------------------------|--------|----|
| 50 Drywall/Plaster Ceiling - Paint, 1 Coat         | 110.00 | SF |
| 51 Drywall/Plaster Wall - Paint, 1 Coat            | 270.55 | SF |
| 52 Clean, Strip & Wax Vinyl Composition Floor Tile | 110.00 | SF |
| 53 Drywall/Plaster Wall - Paint, 2 Coats           | 270.55 | SF |

 **bedroom 1**

**Length:** 11'      **Width:** 10'      **Height:** 8' Flat  
**Walls:** 336.00 SF      **Walls-sub:** 307.33 SF      **Walls-sub-cas-bsbd:** 286.77 SF  
**Doors:** 16.67 SF      **Windows:** 12.00 SF      **Openings:** 0.00 SF      **Missing Walls:** 0.00 SF  
**Floor:** 110.00 SF      **Ceiling:** 110.00 SF      **Perim (F):** 38.92 LF      **Perim (C):** 42.00 LF



|                                                                                                                                                                      |               |    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----|
| 54 Drywall/Plaster Ceiling - Paint, 1 Coat                                                                                                                           | 110.00        | SF |
| 55 Drywall/Plaster Wall - Paint, 1 Coat                                                                                                                              | 286.77        | SF |
| 56 Floor Leveler, Cement Based Heavy<br> Includes 10% waste on material quantity. | 40.00 (44.00) | SF |
| 57 Floor Tile, Vinyl Good - Replace<br> Includes 10% waste on material quantity.  | 40.00 (44.00) | SF |
| 58 Flooring, Remove & Bag Vinyl Tile                                                                                                                                 | 40.00         | SF |
| 59 Clean, Strip & Wax Vinyl Composition Floor Tile                                                                                                                   | 110.00        | SF |
| 60 Drywall/Plaster Wall - Paint, 2 Coats                                                                                                                             | 286.77        | SF |
| 61 Ceiling Fan, Energy Star Compliant Wood Finish, 52" - Replace                                                                                                     | 1             | EA |




Housing Authority of the Cherokee Nation  
PO Box 1007,  
Tahlequah, Oklahoma 74465-1007  
918-456-5482 | 1-800-837-2869

| Description                                                       | Quantity | Per                     |
|-------------------------------------------------------------------|----------|-------------------------|
| <b>ESTIMATE: Rehab (Housing Authority of the Cherokee Nation)</b> |          |                         |
| Approved                                                          |          | Claim #10332, Gary Byrd |

#### bedroom 3


**Length:** 12'  
**Width:** 9'8"  
**Height:** 8' Flat  
**Walls:** 346.66 SF  
**Walls-sub:** 317.99 SF  
**Walls-sub-cas-bsbd:** 297.04 SF  
**Doors:** 16.67 SF  
**Windows:** 12.00 SF  
**Openings:** 0.00 SF  
**Missing Walls:** 0.00 SF  
**Floor:** 116.00 SF  
**Ceiling:** 116.00 SF  
**Perim (F):** 40.26 LF  
**Perim (C):** 43.34 LF



|                                                    |                 |    |
|----------------------------------------------------|-----------------|----|
| 62 Drywall/Plaster Ceiling - Paint, 1 Coat         | 116.00          | SF |
| 63 Drywall/Plaster Wall - Paint, 1 Coat            | 297.04          | SF |
| 64 Clean, Strip & Wax Vinyl Composition Floor Tile | 116.00          | SF |
| 65 Drywall, Ceiling 5/8", Taped - Replace          | 116.00 (121.80) | SF |
| Includes 5% waste on material quantity.            |                 |    |
| 66 Insulation, Ceiling, Batt, Faced 9" - Replace   | 116.00          | SF |
| 67 Drywall/Plaster Wall - Paint, 2 Coats           | 297.04          | SF |

#### Bedroom


**Length:** 12'4"  
**Width:** 13'  
**Height:** 8' Flat  
**Walls:** 405.34 SF  
**Walls-sub:** 364.67 SF  
**Walls-sub-cas-bsbd:** 337.16 SF  
**Doors:** 16.67 SF  
**Windows:** 24.00 SF  
**Openings:** 0.00 SF  
**Missing Walls:** 0.00 SF  
**Floor:** 160.33 SF  
**Ceiling:** 160.33 SF  
**Perim (F):** 47.58 LF  
**Perim (C):** 50.66 LF



|                                                    |        |    |
|----------------------------------------------------|--------|----|
| 68 Drywall/Plaster Ceiling - Paint, 1 Coat         | 160.33 | SF |
| 69 Drywall/Plaster Wall - Paint, 1 Coat            | 337.16 | SF |
| 70 Clean, Strip & Wax Vinyl Composition Floor Tile | 160.33 | SF |
| 71 Drywall/Plaster Wall - Paint, 2 Coats           | 337.16 | SF |

#### Living Room




**Length:** 15'10"  
**Width:** 13'  
**Height:** 8' Flat  
**Walls:** 461.34 SF  
**Walls-sub:** 288.00 SF  
**Walls-sub-cas-bsbd:** 267.88 SF  
**Doors:** 20.00 SF  
**Windows:** 20.00 SF  
**Openings:** 133.33 SF  
**Missing Walls:** 0.00 SF  
**Floor:** 205.83 SF  
**Ceiling:** 205.83 SF  
**Perim (F):** 37.60 LF  
**Perim (C):** 40.99 LF



|                                                                  |        |    |
|------------------------------------------------------------------|--------|----|
| 72 Drywall/Plaster Ceiling - Paint, 1 Coat                       | 205.83 | SF |
| 73 Drywall/Plaster Wall - Paint, 1 Coat                          | 267.88 | SF |
| 74 Clean, Strip & Wax Vinyl Composition Floor Tile               | 205.83 | SF |
| 75 Drywall/Plaster Wall - Paint, 2 Coats                         | 267.88 | SF |
| 76 Door, Entry, Prehung, Panel, Steel Very Good - Replace        | 1      | EA |
| 77 Door, Entry, Panel - Prime & Paint                            | 2      | EA |
| 78 Door, Storm/Screen, Aluminum/Vinyl, Good - Replace            | 1      | EA |
| 79 Ceiling Fan, Energy Star Compliant Wood Finish, 52" - Replace | 1      | EA |



Housing Authority of the Cherokee Nation  
PO Box 1007,  
Tahlequah, Oklahoma 74465-1007  
918-456-5482 | 1-800-837-2869

| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Quantity      | Per                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------------|
| <b>ESTIMATE: Rehab (Housing Authority of the Cherokee Nation)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |                         |
|  Approved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |               | Claim #10332, Gary Byrd |
| <b>Hallway</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |                         |
| <div><div><b>Length:</b> 22'<br/><b>Walls:</b> 400.00 SF<br/><b>Doors:</b> 101.68 SF<br/><b>Floor:</b> 66.00 SF</div><div><b>Width:</b> 3'<br/><b>Walls-sub:</b> 278.33 SF<br/><b>Windows:</b> 0.00 SF<br/><b>Ceiling:</b> 66.00 SF</div><div><b>Height:</b> 8' Flat<br/><b>Walls-sub-cas-bsbd:</b> 243.08 SF<br/><b>Openings:</b> 20.00 SF<br/><b>Perim (F):</b> 29.06 LF</div><div><b>Missing Walls:</b> 0.00 SF<br/><b>Perim (C):</b> 47.50 LF</div></div> <div></div>                         |               |                         |
| 80 Drywall/Plaster Ceiling - Paint, 1 Coat                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 66.00         | SF                      |
| 81 Drywall/Plaster Wall - Paint, 1 Coat                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 243.08        | SF                      |
| 82 Floor Tile, Vinyl Very Good - Replace<br> Includes 10% waste on material quantity.                                                                                                                                                                                                                                                                                                                                                                                                               | 20.00 (22.00) | SF                      |
| 83 Floor Leveler, Cement Based Heavy<br> Includes 10% waste on material quantity.                                                                                                                                                                                                                                                                                                                                                                                                                   | 10.00 (11.00) | SF                      |
| 84 Clean, Strip & Wax Vinyl Composition Floor Tile                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 66.00         | SF                      |
| 85 Drywall/Plaster Wall - Paint, 2 Coats                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 243.08        | SF                      |
| 86 Concrete Epoxy Injection<br> Includes 5% waste on material quantity.                                                                                                                                                                                                                                                                                                                                                                                                                             | 29.06 (30.51) | LF                      |
| <b>Kitchen</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |                         |
| <div><div><b>Length:</b> 15'9"</div><div><b>Width:</b> 10'</div><div><b>Height:</b> 8' Flat</div><div><b>Walls:</b> 465.34 SF<br/><b>Doors:</b> 0.00 SF<br/><b>Floor:</b> 146.39 SF</div><div><b>Walls-sub:</b> 362.01 SF<br/><b>Windows:</b> 30.00 SF<br/><b>Ceiling:</b> 146.39 SF</div><div><b>Walls-sub-cas-bsbd:</b> 336.64 SF<br/><b>Openings:</b> 73.33 SF<br/><b>Perim (F):</b> 48.99 LF</div><div><b>Missing Walls:</b> 0.00 SF<br/><b>Perim (C):</b> 48.99 LF</div></div> <div></div> |               |                         |
| 87 Drywall/Plaster Ceiling - Paint, 1 Coat                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 146.39        | SF                      |
| 88 Drywall/Plaster Wall - Paint, 1 Coat                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 336.64        | SF                      |
| 89 Clean, Strip & Wax Vinyl Composition Floor Tile                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 146.39        | SF                      |
| 90 Base Molding, Paint Grade, Up to 3" - Replace<br> Includes 6% waste on material quantity.                                                                                                                                                                                                                                                                                                                                                                                                      | 30.00 (31.80) | LF                      |
| 91 Drywall/Plaster Wall - Paint, 2 Coats                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 336.64        | SF                      |
| 92 Range Hood, Non-Vented 30", Good - Replace                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1             | EA                      |
| 93 Ceiling Fan, Energy Star Compliant Wood Finish, 52" - Replace                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1             | EA                      |
| <b>Closet</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |               |                         |
| <div><div><b>Length:</b> 2'8"</div><div><b>Width:</b> 3'</div><div><b>Height:</b> 8' Flat</div><div><b>Walls:</b> 90.66 SF<br/><b>Doors:</b> 0.00 SF<br/><b>Floor:</b> 8.00 SF</div><div><b>Walls-sub:</b> 90.66 SF<br/><b>Windows:</b> 0.00 SF<br/><b>Ceiling:</b> 8.00 SF</div><div><b>Walls-sub-cas-bsbd:</b> 87.38 SF<br/><b>Openings:</b> 0.00 SF<br/><b>Perim (F):</b> 11.34 LF</div><div><b>Missing Walls:</b> 0.00 SF<br/><b>Perim (C):</b> 11.34 LF</div></div> <div></div>            |               |                         |
| 94 Drywall/Plaster Ceiling - Paint, 1 Coat                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 8.00          | SF                      |
| 95 Drywall/Plaster Wall - Paint, 2 Coats                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 87.38         | SF                      |