

# HACN HOUSING REHAB SITE DIRECTIONS

---

Name: Rex Chancellor


Telephone: (918)219-9059

Address: 48370 CR 525  
Salina, OK 74365

County: Delaware Year Built: 1977

GPS Coordinates: 36.316726-94.934362 Drive Time: 1hr

---

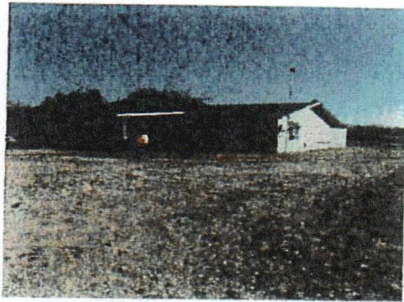

**Directions:** From Cherokee Nation, Turn left go 2mi turn right go 2mi towards 82/62 jct continue north go towards kenwood at the intersection turn right go 1.5mi to 4way intersection with gravel road turn left go down drive house sits out in the field

---

Melvin Blossom  
Cost Estimator/Inspector

11/20/2024  
Date

## WorkWrite-Up and Bid Document/By Trade

**Rex Chancellor**

48370 CR 525 Salina, OK 7-4365

(918) 219-9059

Contractor Name: \_\_\_\_\_

Contractor Signature: \_\_\_\_\_

*This document must be signed to be a valid bid.*

**PROJECT TYPE: Emergency Repairs**

**Bid Due Date:** \_\_\_\_\_

Trade	Work Description / Comments	Gen. Spec.	Qty Unit	Item Bid
<b>Roofing</b>				
1	Area: ROOF	Div.# 7.A.	30 Sq	<input type="text"/>
Roofing/Heritage/30 Year Warranty. Install fiberglass shingles/Minimum 30 year warranty/Use Marlarkey/Tamko or written approved equal. 30 lb Felt, Painted Style D Drip Edge, Pipe Flashing, Valley Flashing, Step Flashing & Attic vents.				
2	Area: ROOF	Div.# 7.C	30 Sq	<input type="text"/>
Roofing/Strip/Asphalt-Fiberglass. Remove all layers, and haul roofing debris to a Legal Waste Dump for disposal.				
3	Area: ROOF	Div.# 7.A	160 SF	<input type="text"/>
Sheathing/7/16" OSB/Replace. Replace existing sheathing/Use 7/16" OSB Where needed.				
4	Area: ROOF	Div.# 7.A	320 SF	<input type="text"/>
Sheathing/7/16" OSB/Replace. Replace existing sheathing/Use 7/16" OSB. will be the front porch roof				

<i>Trade</i>	<i>Work Description / Comments</i>	<i>Gen. Spec.</i>	<i>Qty Unit</i>	<i>Item Bid</i>
	All construction shall be in accordance with local codes, manufacturers' recommended installation procedures, good quality workmanship practices, General Specifications and Lead-Based Paint requirements when applicable. Conflicts between requirements will be resolved by compliance with the more stringent requirement.			<div>Total:</div> <div></div>