

HACN HOUSING REHAB SITE DIRECTIONS

Name: Kyle Martin


Telephone: (918)766-5154

Address: 208 N Wettack St.
Ochelata, OK 74051

County: Washington

Year Built: 1979

GPS Coordinates: 36.6026157-95.9783049 Drive Time: 2hr

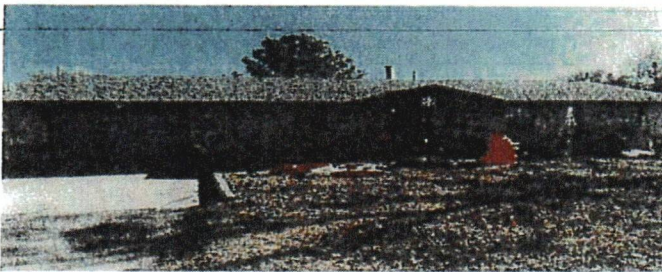

Directions: From Cherokee Nation, turn left go 2mi turn right go 2mi towards 82/62 jct continue north to cherokee turnpike take turnpike to hwy 75 go north approx 28mi turn left on 2900rd 2.5mi turn right on Ochelata St go to weldon ave turn left onto wettack st house be on right

Melvin Blossom
Cost Estimator/Inspector

10/17/2024
Date

WorkWrite-Up and Bid Document/By Trade

Kyle Martin

208 N Wettrack St. Ochelata, OK 7-4051
(918) 766-5154

Contractor Name:

Contractor Signature:

This document must be signed to be a valid bid.

PROJECT TYPE: Rehabilitation

Bid Due Date:

Trade	Work Description / Comments	Gen. Spec.	Qty Unit	Item Bid
Carpentry				
1 Area: EXTERIOR	Fascia/Replace/1" x 6". Replace Fascia/1" x 6".	Div.# 6.P	205 LF	
2 Area: EXTERIOR	Soffit/Plywood/Replace. Replace existing soffit with new soffit/AC plywood.	Div.# 6.P.	384 SF	
Paint & Finish				
3 Area: EXTERIOR	Fascia/Paint fascia/two coats. match close as possible to existing color	Div.# 9.N.4	205 LF	
4 Area: EXTERIOR	Soffit/Paint soffit/two coats. match existing color close as possible	Div.# 9.N.4	384 SF	
Sheetmetal & Gutters				

Trade	Work Description / Comments	Gen. Spec.	Qty Unit	Item Bid
Sheetmetal & Gutters				
5 Area: EXTERIOR	Gutters/Install/K-Style Aluminum/6". Install new "K" style Aluminum gutter (6" wide) with downspouts.	Div. # 7.F.	120 LF	
will be both front and back must add solid corrugated plastic pipe towards back of house to push water away from front				
6 Area: EXTERIOR	Vent/Install/Soffit. Install soffit vents/16" x 8"/mill finish.	Div. # 5.J.	12 Ea	
will be both front (6) and back (6)				

Total:

All construction shall be in accordance with local codes, manufacturers' recommended installation procedures, good quality workmanship practices, General Specifications and Lead-Based Paint requirements when applicable. Conflicts between requirements will be resolved by compliance with the more stringent requirement. Contractor awarded the job will be responsible for conducting safe work practices that comply with OSHA Construction Standards for Asbestos Workers. Asbestos report, where required, will be attached if areas tested are 1% or greater. See attached Asbestos Sampling Report for location and testing of Planned Work Activities.