



## HACN HOUSING REHAB SITE DIRECTIONS

---


Name: Clarissa Darwin 918-407-0206 - cell phone  
Telephone: (918)428-2772

Address: 3367 North Garrison Ave  
Tulsa, OK 74106

County: Tulsa Year Built: 1954

GPS Coordinates: 36.20512 95.98554 Drive Time: 2 hours

---

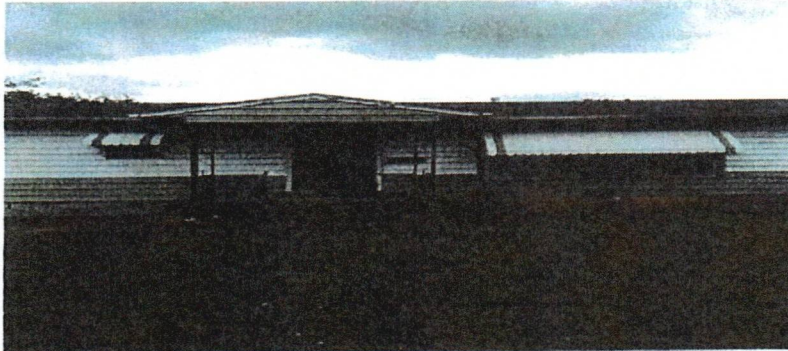

**Directions:** From Cherokee Nation, 62 to 82 North to 412 West to Tulsa then I 244 west exit onto Hwy 11 toward air port follow Hwy to Gilcrease Expy exit ramp on right go to Mohawk Blvd turn left go to North Peoria Ave turn North go to East 36<sup>th</sup> Street North turn left go to North Garrison Ave turn left house on left side.

---

Darren Choate 918-316-5835  
Cost Estimator/Inspector

06-01-2021  
Date



Housing Authority of the Cherokee Nation  
PO Box 1007,  
Tahlequah, Oklahoma 74465-1007  
918-456-5482 | 1-800-837-2869

Description	Quantity	Per
ESTIMATE: roof (Housing Authority of the Cherokee Nation)		Claim #10802, Clarissa Darwin
Approved		
FLOORPLAN: Floorplan		

General Items

1 Dumpster 10 Yard


1

EA

ROOFPLAN: Roofplan

Roof, Roof 3, Roof 2

Roof area: 1,419.07 SF    Squares: 14.2 SQ    Soffit: 301.75 SF  
Eaves: 95.03 LF    Ridge: 60.10 LF



2 Flashing, Plumbing Vent Aluminum - Replace	1	EA
3 Valley Flashing, Aluminum - Tear Out	21.68	LF
4 Valley Flashing, Aluminum - Replace <input type="checkbox"/> Includes 5% waste on material quantity.	21.68 (22.76)	LF
5 Vent Pipe Flashing, Furnace Aluminum, 4" - Replace <input type="checkbox"/> replace caps on vents	4	EA
6 Ridge Cap Shingles, Fiberglass - Replace <input type="checkbox"/> Includes 10% waste on material quantity.	48.00 (52.80)	LF
7 Shingles, Laminated/Architectural Very Good - Tear Out	14.19	SQ
8 Shingles, Laminated/Architectural Very Good - Replace <input type="checkbox"/> Includes 10% waste on material quantity.	14.19 (15.61)	SQ
9 Roof Vent, Static, Box/Turtle, Aluminum - Replace	2	EA
10 Sheathing, Roof OSB, 1/2" - Replace <input type="checkbox"/> Includes 5% waste on material quantity. <input type="checkbox"/> replace sheathing where needed weak spots	320.00 (336.00)	SF
11 Felt, 30LB - Replace	14.19	SQ
12 Beaded Board Soffit - Replace <input type="checkbox"/> Includes 5% waste on material quantity. <input type="checkbox"/> paint and caulk all Soffit	181.29 (190.36)	SF
13 Fascia, Wood Cedar 1" x 8" - Replace <input type="checkbox"/> Includes 5% waste on material quantity. <input type="checkbox"/> caulk and paint fascia	164.55 (172.78)	LF
14 Drip Edge (Rake + Eave) Aluminum, Mill Finish - Replace <input type="checkbox"/> Includes 5% waste on material quantity.	164.55 (172.78)	LF

Date: \_\_\_\_\_

Total: \_\_\_\_\_

Contractor  
Signature: \_\_\_\_\_