



HACN HOUSING REHAB SITE DIRECTIONS


#13432

Telephone: (918) 797-0406

Address: E 495Rd
Salina, OK 74365

County: Mayer Year Built: 1958

GPS Coordinates: 36.2997269,-95.1244150 Drive Time: 48MIN

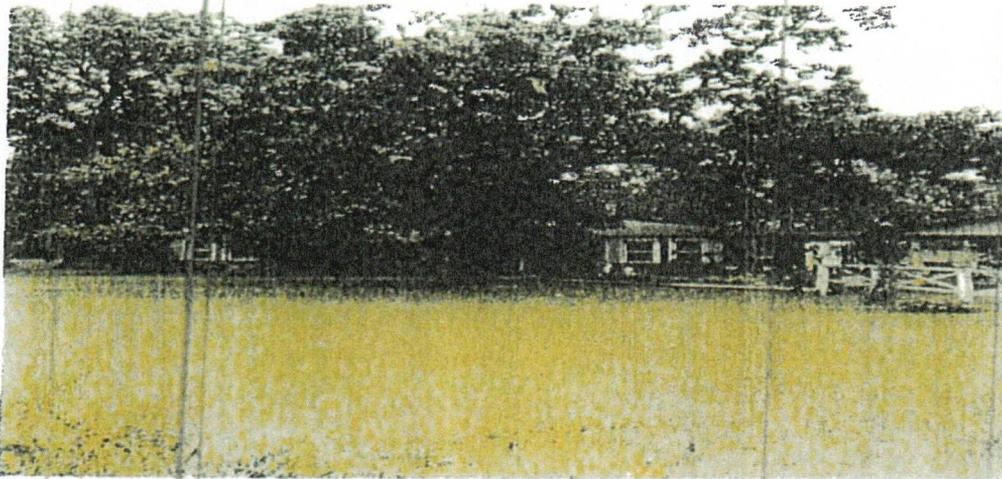

Directions: From Cherokee Nation, Continue to US-62 E/S Muskogee Ave
43 sec (407 ft) Take State Hwy 82 N to Kenwood Rd in Salina 44 min (36.2 mi)
Take NE 4418/D0498 Rd to E 495 in Wickliffe 4 min (1.8 mi)
Turn right onto Kenwood Rd 0.5 mi Turn left onto NE 4418/D0498 Rd 1.3 mi
Turn right onto E 495 Destination will be on the left
197 ft
36.2997269, -95.1244150

Larry Ketcher
Cost Estimator/Inspector

9-2-2025
Date

Revised: 1/2017

Work Write-Up and Bid Document/By Trade

#13432

7232 E 495 Rd Salina, OK 7-4365
 (918) 797-0406

Contractor Name:

Contractor Signature:

This document must be signed to be a valid bid.

Bid Due Date:

PROJECT TYPE: Rehabilitation

Trade	Work Description / Comments	Gen. Spec.	Qty Unit	Item Bid
Roofing				
1	Area: ROOF Replace Shingles / Install Heritage/30 Yr Warranty, Fiberglass shingles/Use Marlarky/Tamko or approved equal. 30 lb Felt, Painted Style D Drip Edge, Pipe Flashing, Valley Flashing, Step Flashing & Slant Back Attic vents or Ridge vents.	Div.# 7.A.	41 Sq	
2	Area: ROOF Roofing/Strip/Asphalt-Fiberglass. Remove all layers, and haul roofing debris to a Legal Waste Dump for disposal.	Div.# 7.C	41 Sq	

Total:

All construction shall be in accordance with local codes, manufacturers' recommended installation procedures, good quality workmanship practices, General Specifications and Lead-Based Paint requirements when applicable. Conflicts between requirements will be resolved by compliance with the more stringent requirement. Contractor awarded the job will be responsible for conducting safe work practices that comply with OSHA Construction Standards for Asbestos Workers. Asbestos report, where required, will be attached if areas tested are 1% or greater. See attached Asbestos Sampling Report for location and testing of Planned Work Activities.