

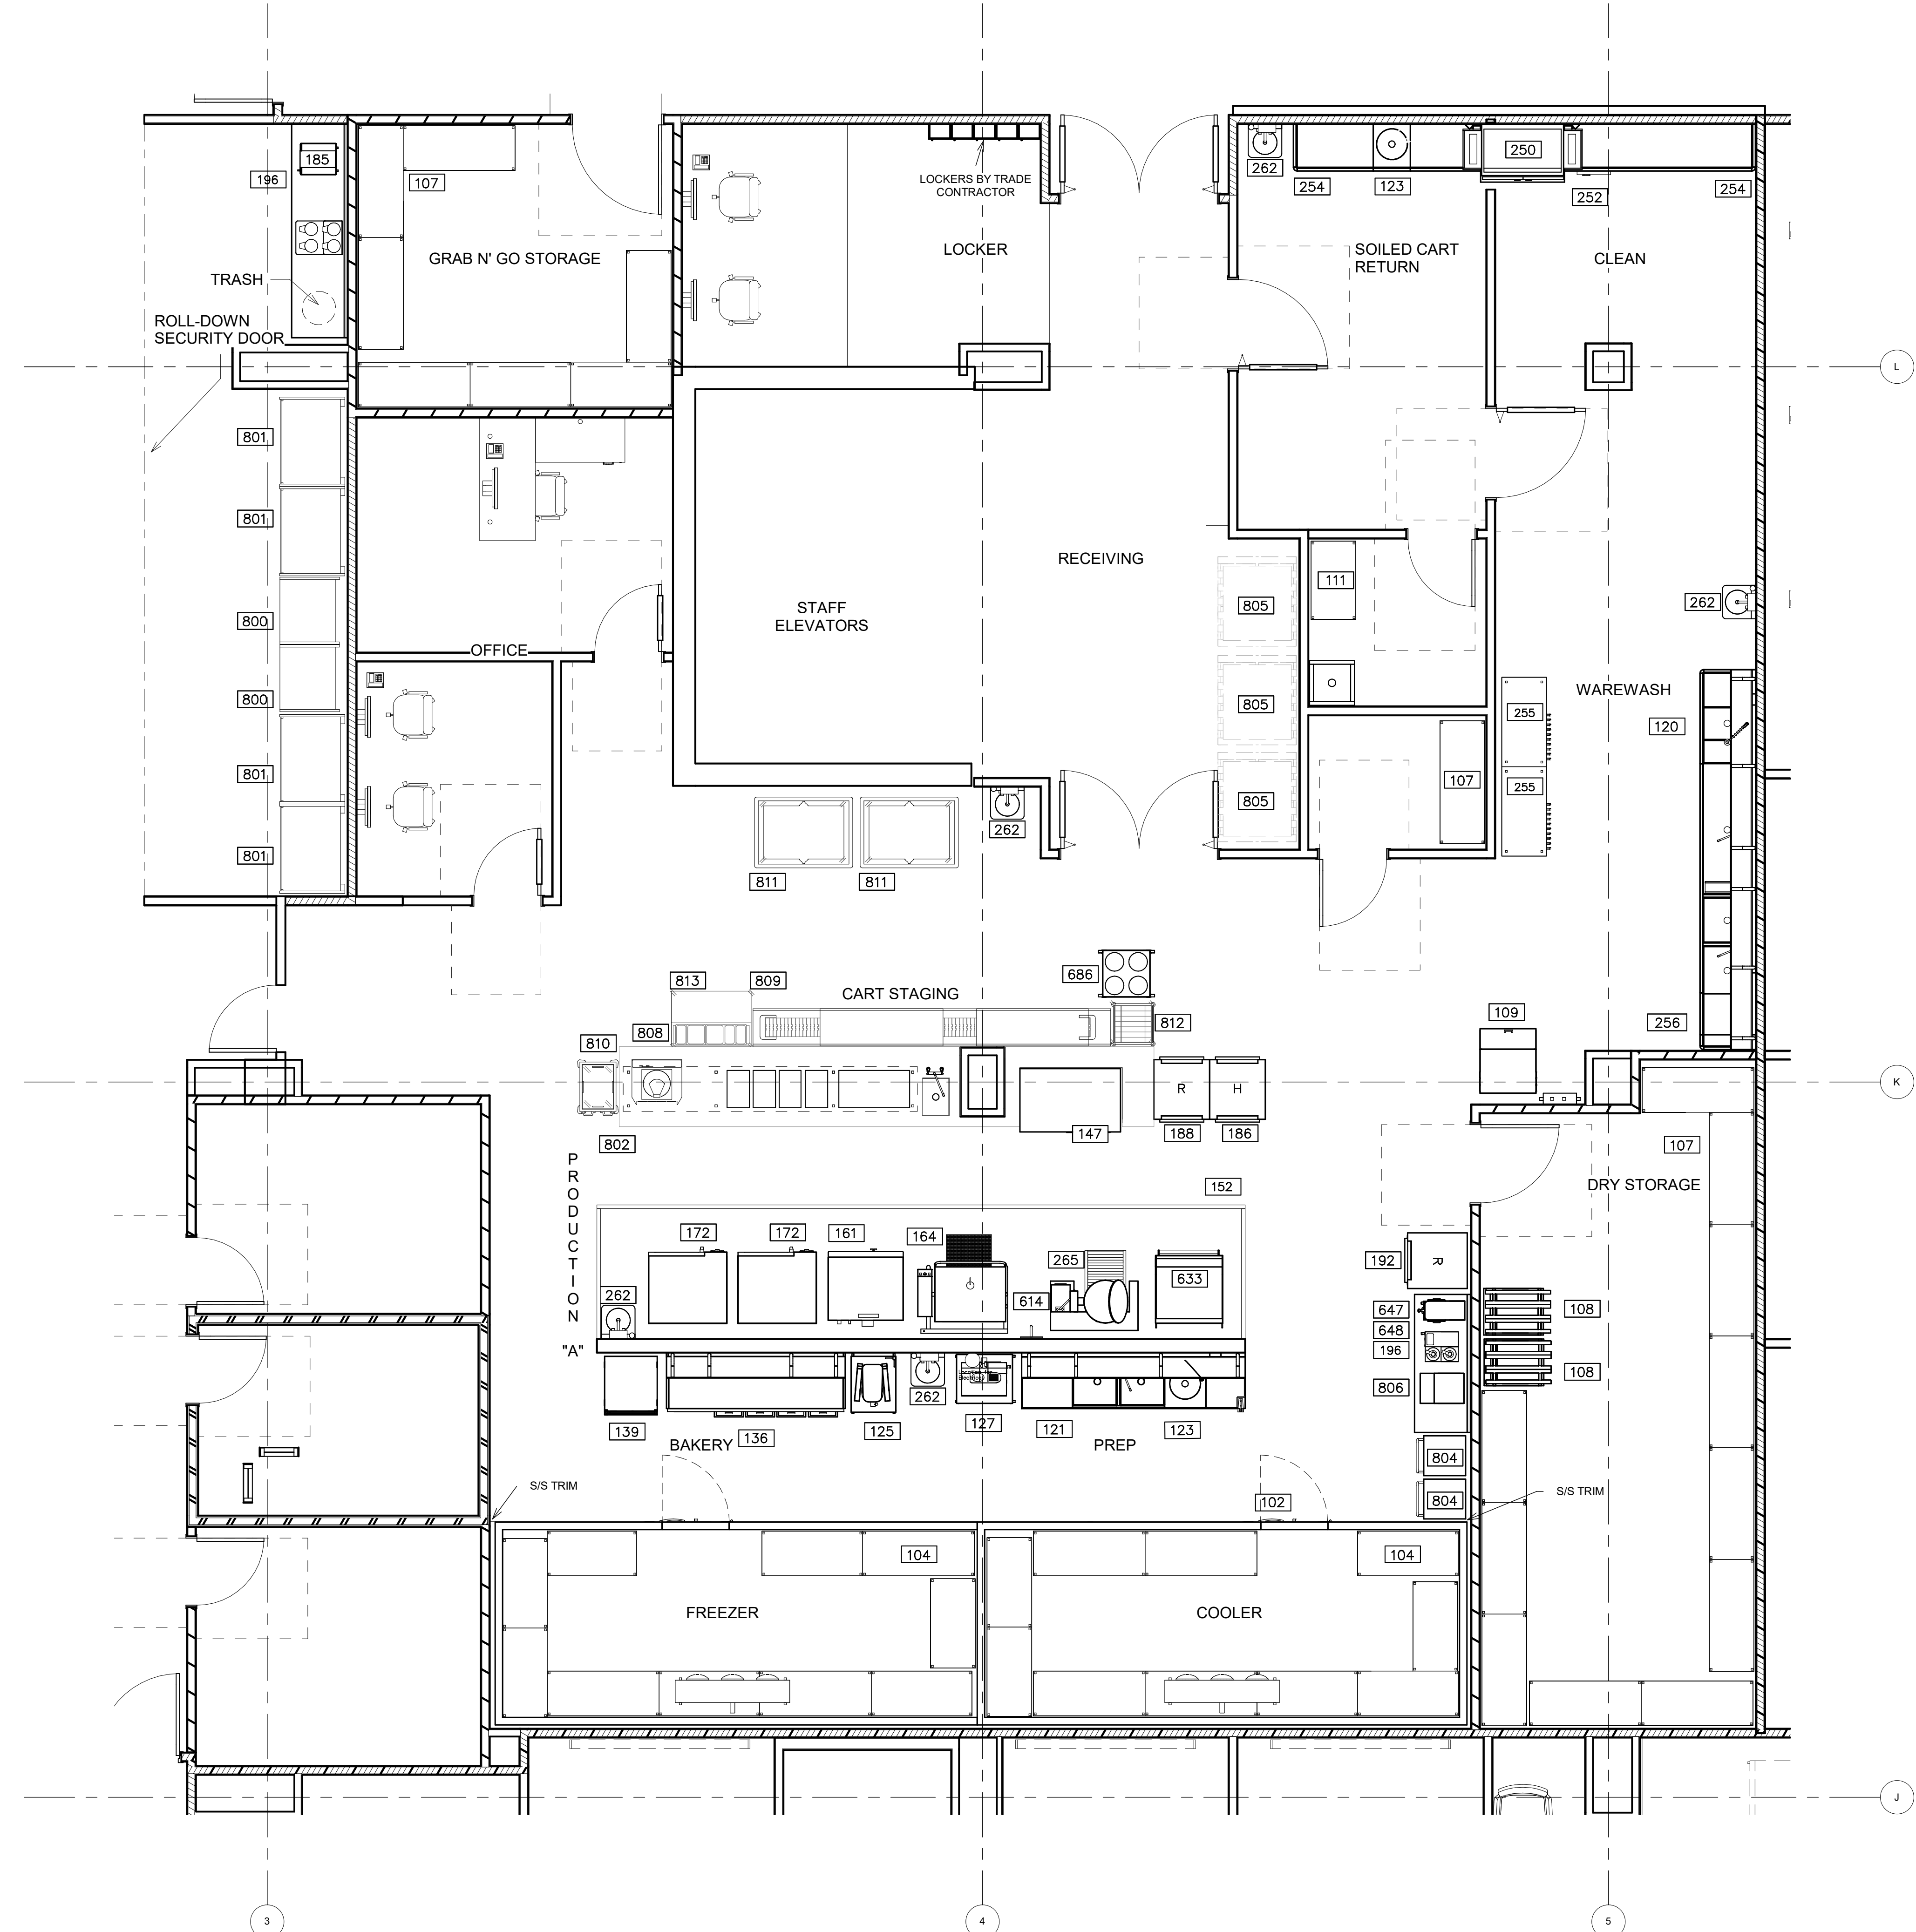


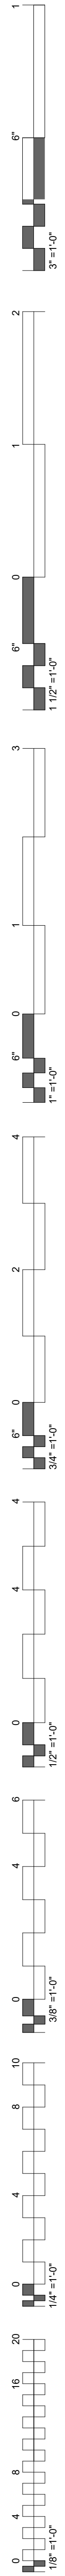


1 FOODSERVICE EQUIPMENT PLAN
1/4" = 1'-0"

FOODSERVICE EQUIPMENT SCHEDULE				
FDP ITEM	QTY	FDP DESCRIPTION	FDP REMARKS	TEXT COLUMN - RENAME OR REMOVE AS REQ'D
102	1	COLD STORAGE ASSEMBLY		
104	2	COLD STORAGE SHELVING		
107	3	DRY STORAGE SHELVING		
108	2	CAN RACK		
109	1	ICE MAKER W/ BIN		
111	1	CHEMICAL SHELF		
120	1	DISPOSER-SINK MOUNT POWERSOAK		
120M	1	DISPOSER - 3HP		
121	1	TWO COMPARTMENT SINK W/DISPOSER		
123	2	DISPOSER - 3HP		
125	1	20 QT. MIXER W/STAND		
127	1	SLICER W/STAND		
136	1	BAKER'S TABLE		
139	1	INSUL MOBILE PROOFER		
147	1	50LB. BLAST CHILLER		
152	1	EXHAUST HOOD		
161	1	CONVECTION OVEN		
164	1	40 GA. TILT BRAISING PAN-MANUAL TILT		
172	2	COMBI OVEN		
185	1	MICROWAVE		
186	1	PASS-THRU HEATED CABINET- 1DR		
188	1	PASS-THRU REFRIGERATOR - 1DR		
192	1	REACH-IN REFRIGERATOR - 1DR		
196	2	BACK COUNTER		
250	1	DISHMACHINE		
252	1	BOOSTER HEATER		
254	2	SOILED & CLEAN DISHTABLE		
255	2	MOBILE UTENSIL SHELF		
256	2	POWERWASH SINK		
262	5	HAND SINK		
265	1	40 GAL. TILT KETTLE		
614	1	FILL FAUCET		
633	1	GRIDDLE W/CONVECTION OVEN BASE		
647	1	TEA/COFFEE BREWER		
648	1	COFFEE BREWER		
686	1	POKER CHIP DOLLY		
800	2	REFRIGERATED MERCHANDISER		
801	4	AMBIENT DISPLAY CASE		
802	1	FOOD DISH UP COUNTER		
804	2	DISH DOLLY		
805	3	PALLET		
806	1	ICE/WATER DISPENSER		
808	1	HEAT ON DEMAND ON TRAY SYSTEM		
809	1	CONVEYOR		
810	1	TRAY DISPENSER		
811	2	MEAL DELIVERY CART		
812	1	STORAGE RACK		
813	1	STARTER STATION		

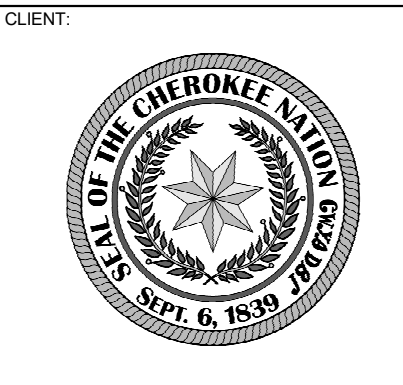

CHEROKEE NATION
W.W. HASTINGS REPLACEMENT HOSPITAL
TAHEQUAH, OKLAHOMA

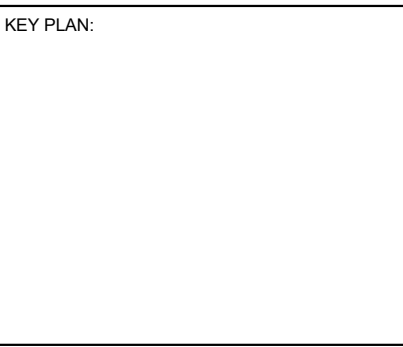

PROJECT PHASE:
SCHEMATIC DESIGN

#	DATE	REVISIONS DESCRIPTION

JOB NUMBER: 21-08.21
DATE: 05-06-2022
SHEET NUMBER:
K1
SHEET TITLE:
FS EQUIPMENT PLAN



CONSULTANT LOGO:



TAHLEQUAH, OKLAHOMA

KEY PLAN:

PROJECT PHASE:

SCHEMATIC DESIGN

[illegible]

JOB NUMBER: 21 08 21

DATE: 05-06-2022

SHEET NUMBER:

K1.6


SHEET TITLE:

FS EXHAUST HOODS



EXHAUST COLLAR CHART					
NO.	SIZE	CFM/FOOT	CFM EACH	FPM	S.P.
1	10" X 14"	210	1523	1567	.50"
3	10" X 14"	210	1523	1567	.50"
5	10" X 14"	210	1523	1567	.50"
7	10" X 14"	210	1523	1567	.50"

SUPPLY COLLAR CHART					
NO.	SIZE	CFM/FOOT	CFM EACH	FPM	S.P.
2	10" X 22"	168	1218	797	.30"
4	10" X 22"	168	1218	797	.30"
6	10" X 22"	168	1218	797	.30"
8	10" X 22"	168	1218	797	.30"




HOODS DESIGNED TO MEET TO THE 2015 IECC C403.2.8 AND
2018 IECC C403.7.5 USING OPTION 2 PROVIDED BY THE CODES.

NOTE TO G.C. AND CEILING GRID INSTALLERS :

NOTE TO G.C. AND CEILING GRID INSTALLERS :
FASTENERS FOR CEILING GRID SURROUNDING KITCHEN HOOD MUST NOT PENETRATE HOOD CAPTURE AREA OR HOOD GREASE PLENUM. IMPROPER PENETRATIONS THROUGH HOOD IN THESE AREAS VIOLATE HOOD U.L. PROCEDURE AND LOCAL MECHANICAL CODE.

UL FILE # MH 30031



**CHEROKEE
HASTINGS
HOSPITAL**

FDP

THIS DRAWING IS THE PROPERTY OF MOD-U-SERVE
AND CAN BE REPRODUCED ONLY BY PERMISSION,
IN WHICH CASE, ALL DRAWINGS MUST BEAR
THE NAME MOD-U-SERVE.

CASE, ALL DRAWINGS MUST
THE NAME MOD-U-SERVE.

**COMMERCIAL
KITCHENS
INC.**

2320 PEYTON ROAD
HOUSTON, TEXAS 77032
281 442 8001

[illegible]

DRAWING #
D22-2073-1.152

DRAWN BY
ADC



☐ REVIEWED BY ☐ APPROVED BY ☐ CHECKED BY	☐ REVIEWED BY ☐ APPROVED BY ☐ CHECKED BY
---	---

DATE
Apr. 26, 2022

SHEET

1


OF 1 SHEET

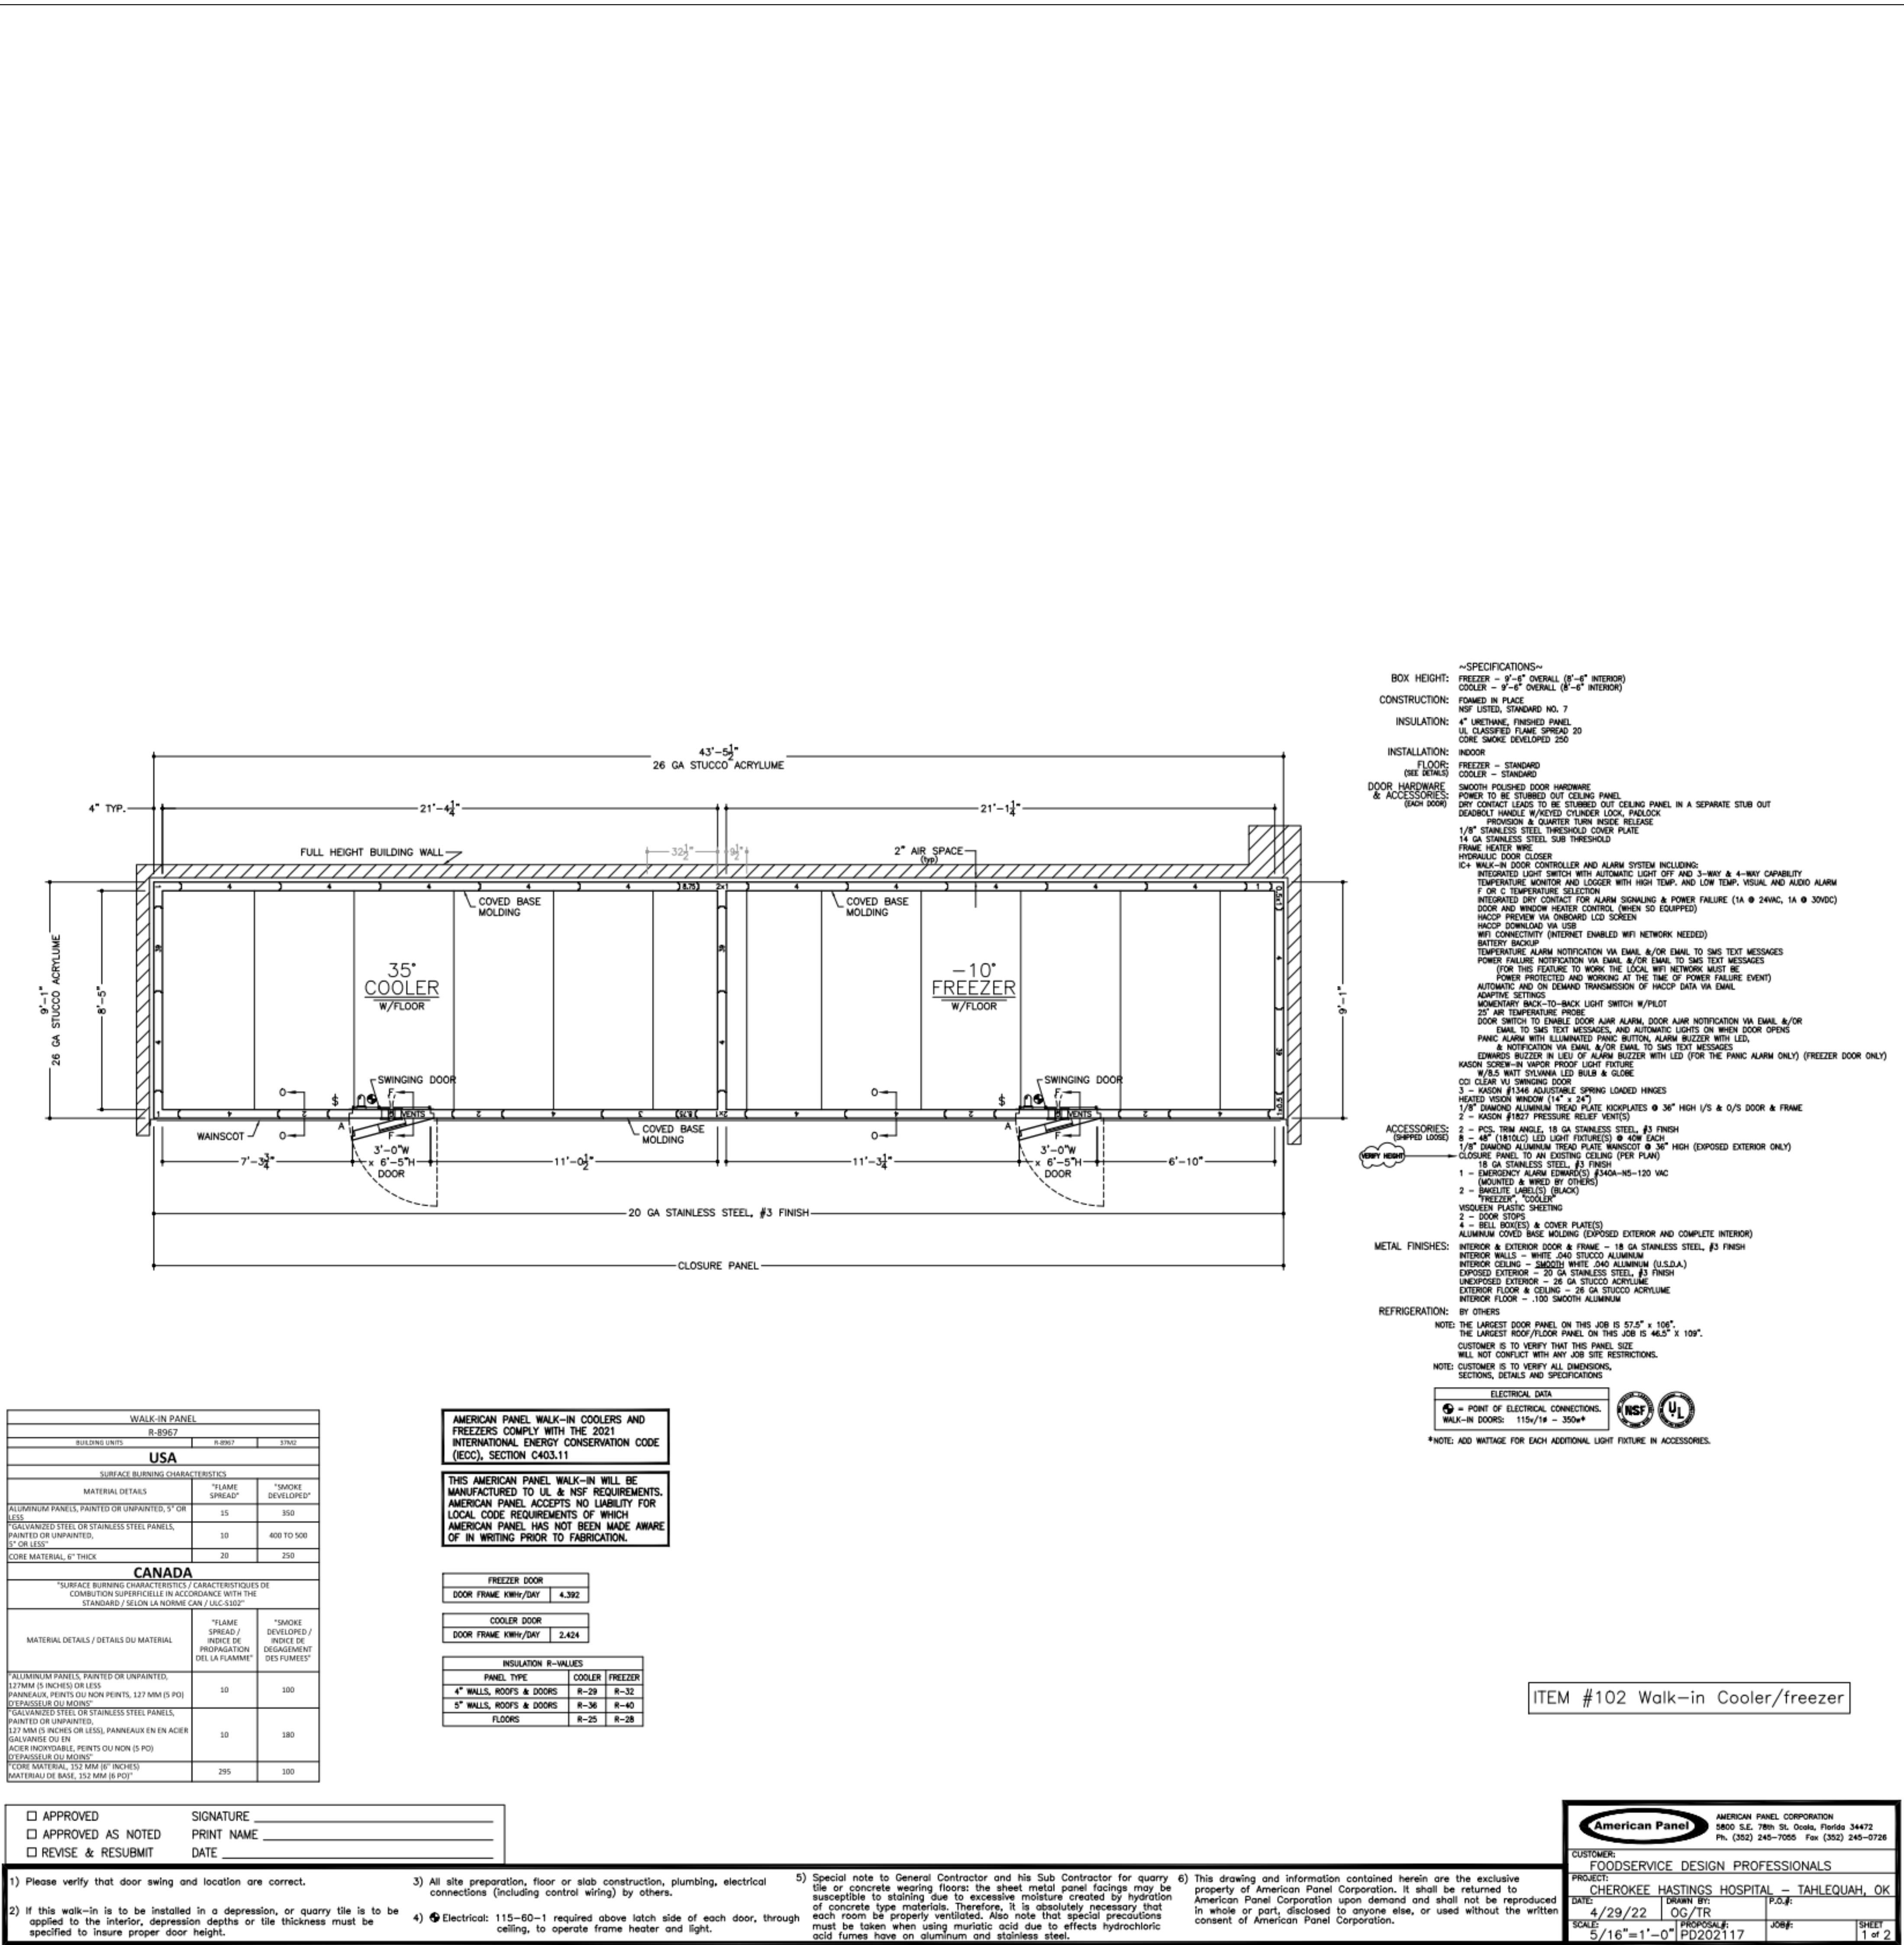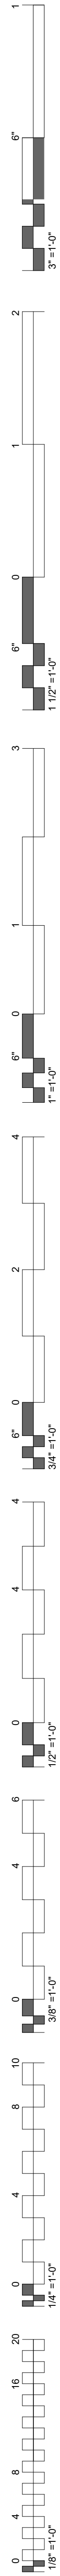


ITEM #102 Walk-in Cooler/freezer

American Panel
AMERICAN PANEL CORPORATION
2800 S.E. 78th St., Ocala, Florida 34472
Ph: (352) 245-7055 Fax: (352) 245-0726

CUSTOMER: FOODSERVICE DESIGN PROFESSIONALS
PROJECT: CHEROKEE HASTINGS HOSPITAL - TAHLEQUAH, OK
DATE: 4/29/22 DRAWN BY: OG/TR P.O.#:
SCALE: 5/16"=1'-0" TOLERANCE: PD202117 JOB#: SHEET: 1 of 2

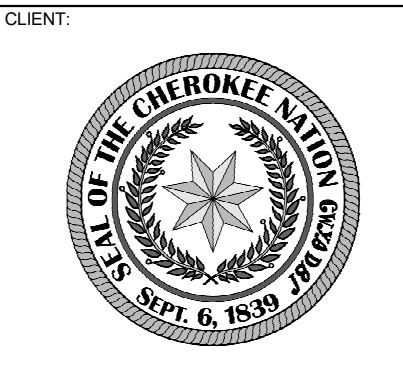









CHEROKEE NATION
W.W. HASTINGS REPLACEMENT HOSPITAL
TAHLEQUAH, OKLAHOMA

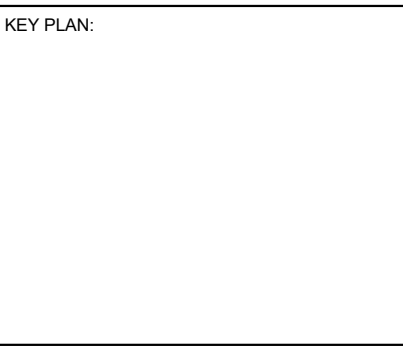

PROJECT PHASE:
SCHEMATIC DESIGN

#	DATE	REVISIONS	DESCRIPTION

JOB NUMBER: 21-08.21
DATE: 05-06-2022
SHEET NUMBER:
K1.8
SHEET TITLE:
FS WALK-INS

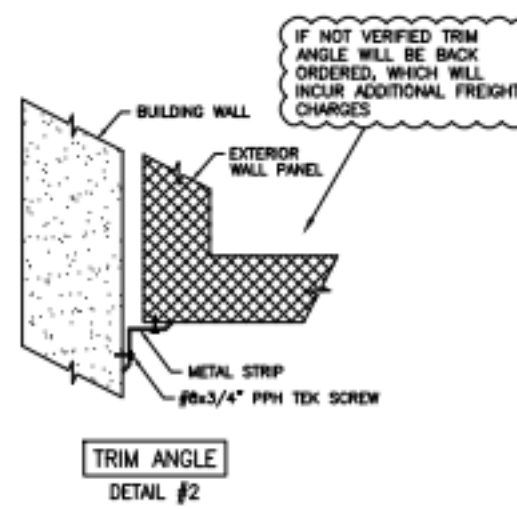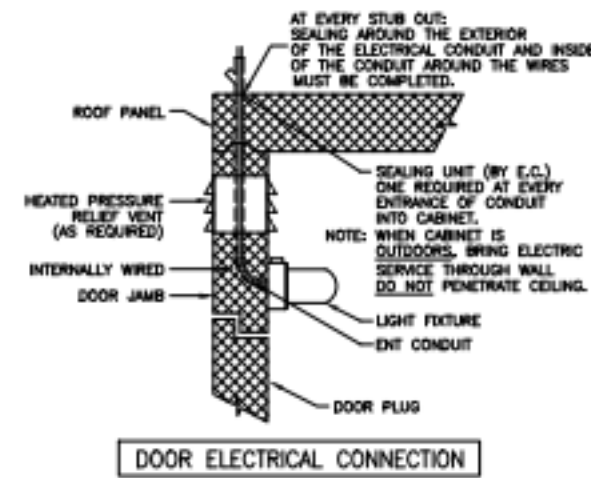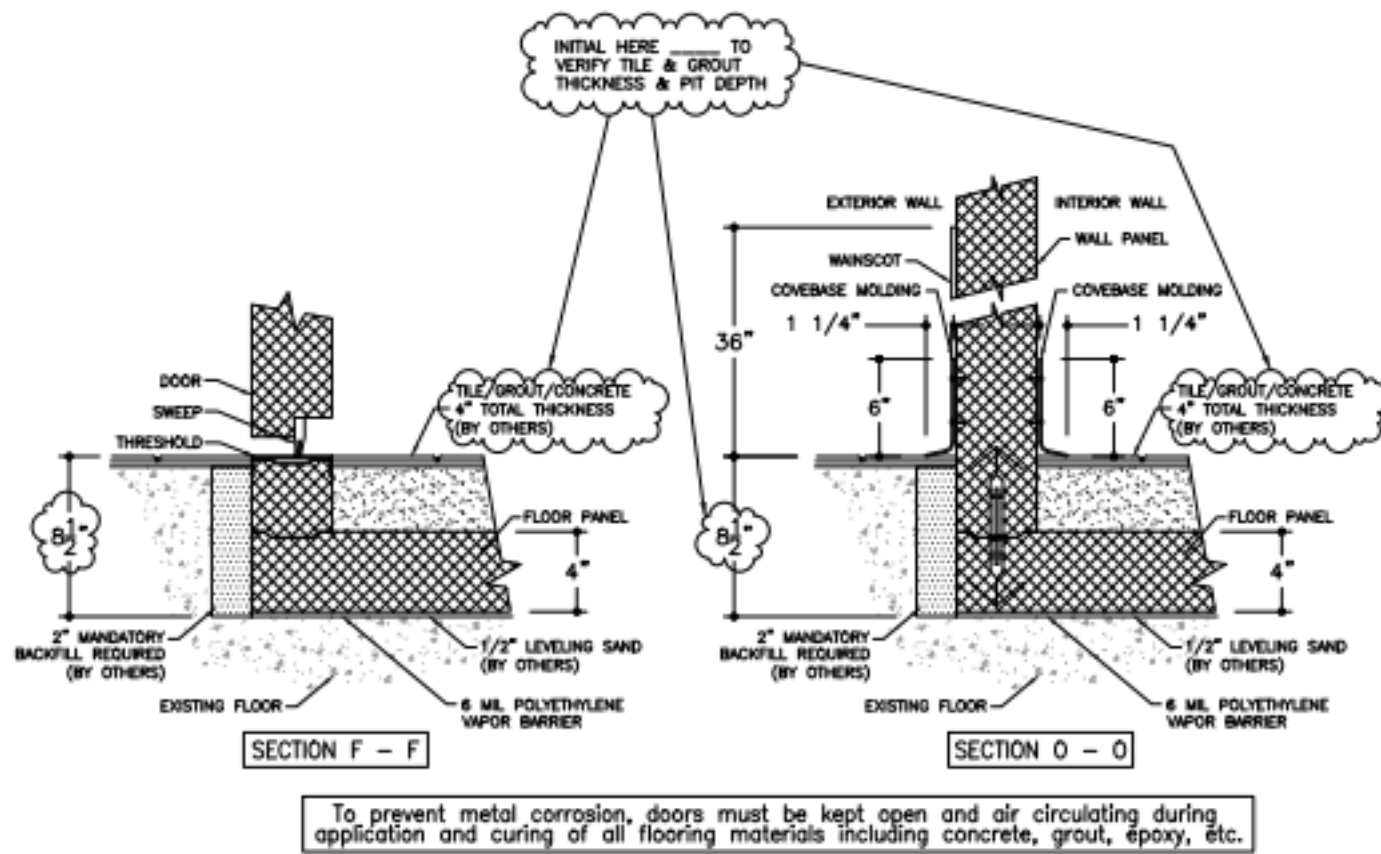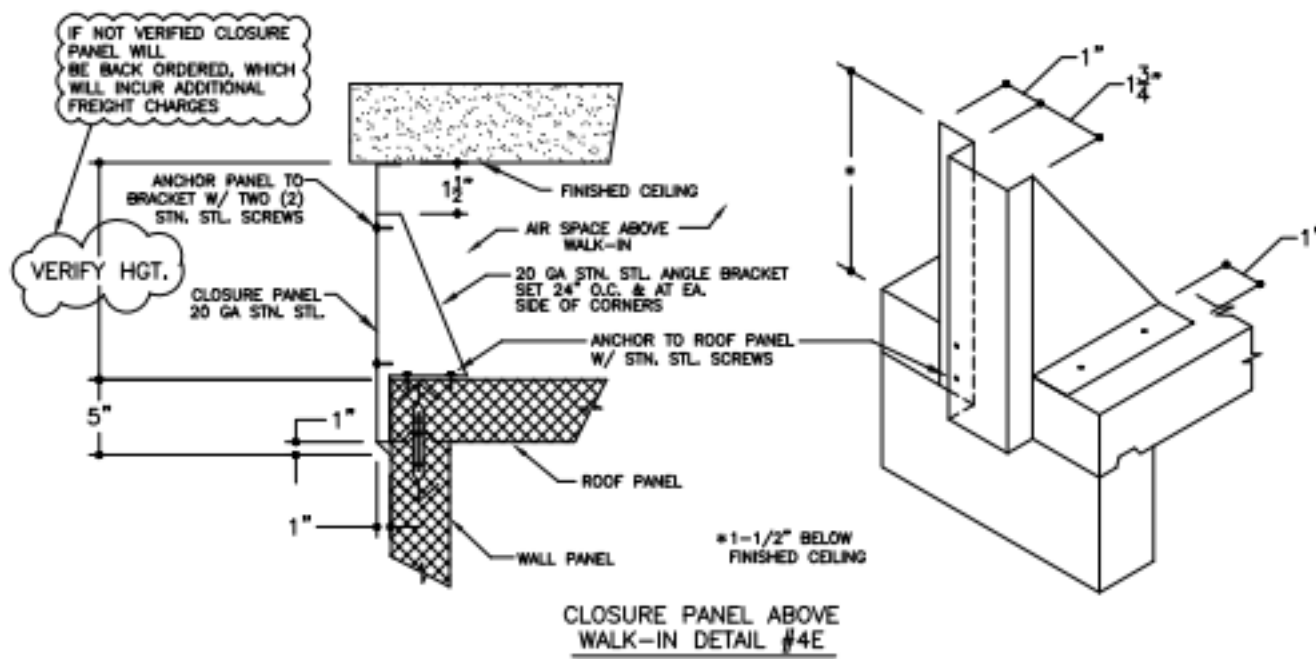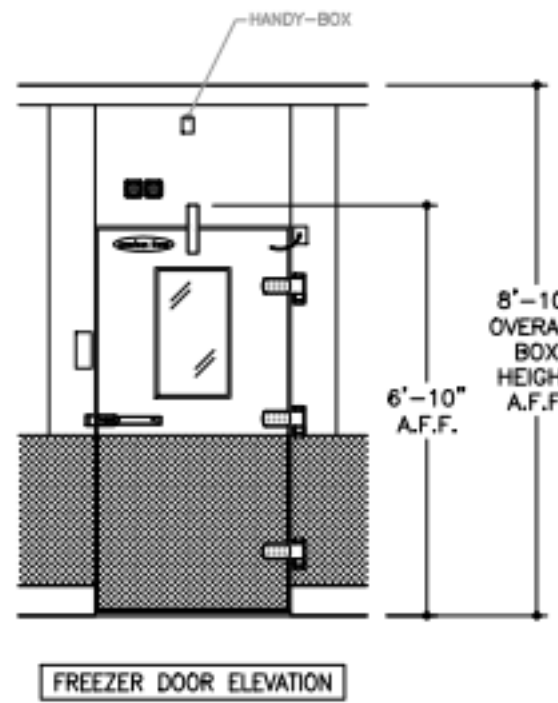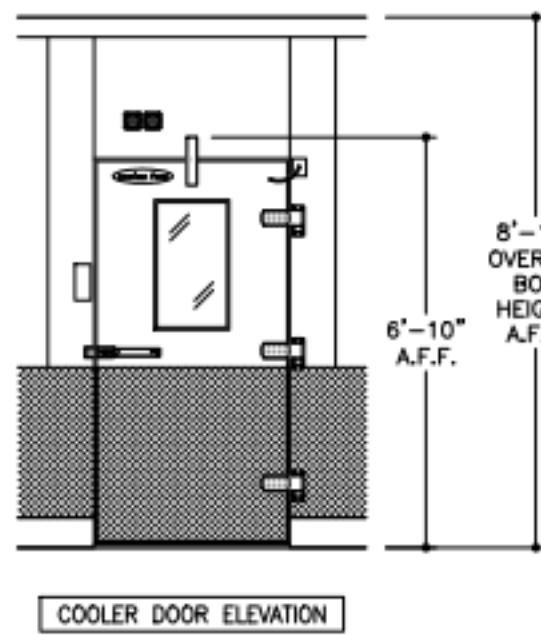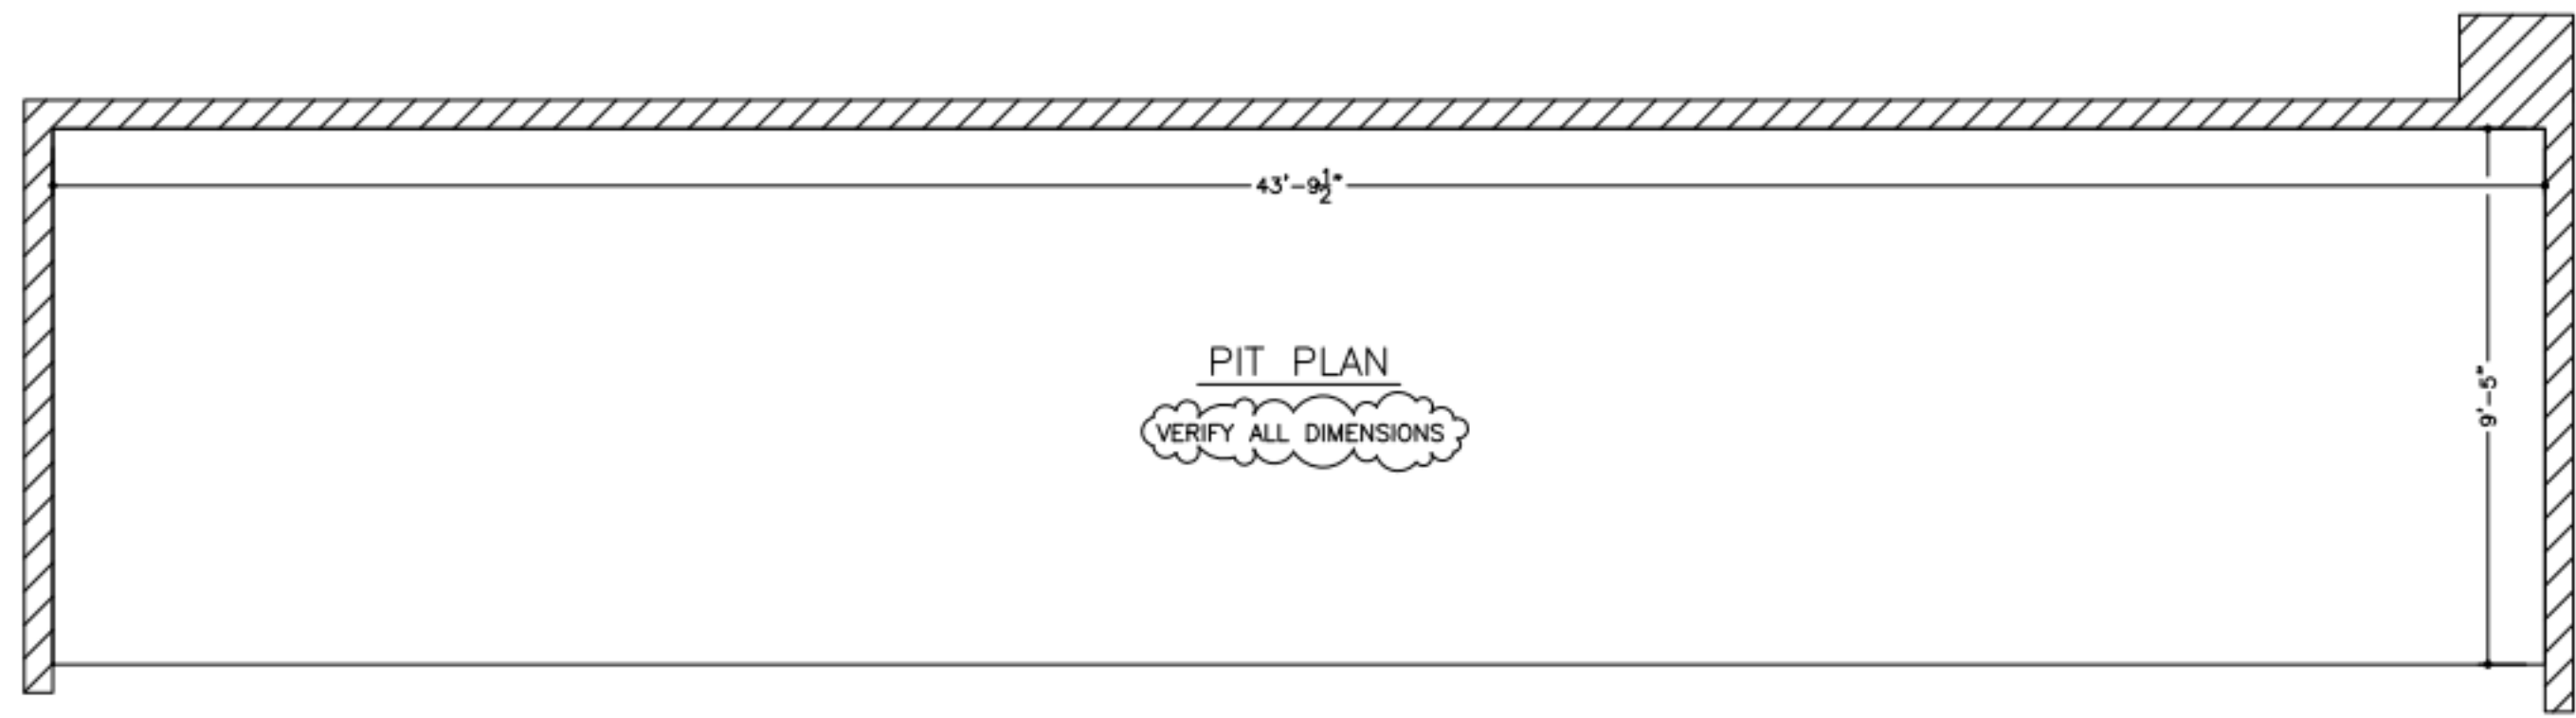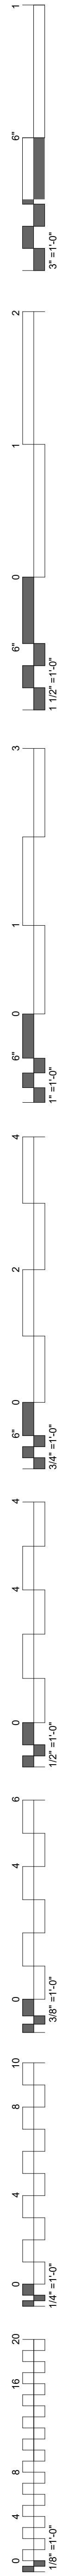

☐ APPROVED
☐ APPROVED AS NOTED
☐ REVISE & RESUBMIT

SIGNATURE _____
PRINT NAME _____
DATE _____

- 1) Please verify that door swing and location are correct.
- 2) If this walk-in is to be installed in a depression, or quarry tile is to be applied to the interior, depression depths or tile thickness must be specified to insure proper door height.
- 3) All site preparation, floor or slab construction, plumbing, electrical connections (including control wiring) by others.
- 4) Electrical: 115-60-1 required above latch side of each door, through ceiling, to operate frame heater and light.
- 5) Special note to General Contractor and his Sub Contractor for quarry tile or concrete wearing floors: the sheet metal panel facings may be susceptible to staining due to excessive moisture created by hydration of concrete type materials. Therefore, it is absolutely necessary that each room be properly ventilated. Also note that special precautions must be taken when using muriatic acid due to effects hydrochloric acid fumes have on aluminum and stainless steel.
- 6) This drawing and information contained herein are the exclusive property of American Panel Corporation. It shall be returned to American Panel Corporation upon demand and shall not be reproduced in whole or part, disclosed to anyone else, or used without the written consent of American Panel Corporation.


American Panel AMERICAN PANEL CORPORATION
3800 S.E. 78th St., Ocala, Florida 34472
Ph. (352) 345-7000 Fax (352) 345-0728

CUSTOMER: FOODSERVICE DESIGN PROFESSIONALS

PROJECT: CHEROKEE HASTINGS HOSPITAL - TAHLEQUAH, OK

DRAWN BY: DATE: 4/29/22

SCALE: 3/16"=1'-0" PROPOSAL: PD202117 JOB#: SHEET: 2 of 2

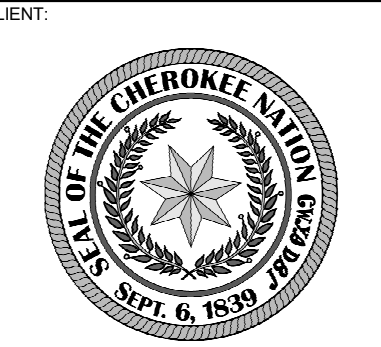

CHEROKEE NATION
W.W. HASTINGS REPLACEMENT HOSPITAL
TAHLEQUAH, OKLAHOMA

KEY PLAN:

PROJECT PHASE:
SCHEMATIC DESIGN

#	DATE	REVISIONS DESCRIPTION

JOB NUMBER: 21-08.21
DATE: 05-06-2022
SHEET NUMBER:
K1.8.1
SHEET TITLE:
FS WALK-INS