

# WorkWrite-Up and Bid Document/By Trade

**Beverly Scates [Foundation]**

3507 E. Xyler Street Tulsa, OK 7-4115  
 (918) 834-4186

*Contractor Name:*

*Contractor Signature:*

*This document must be signed to be a valid bid.*

**PROJECT TYPE: Rehabilitation**

**Bid Due Date:**

Trade	Work Description / Comments	Gen. Spec.	Qty Unit	Item Bid
<b>Concrete</b>				
1	<b>Area: FOUNDATION</b> Foundation/ Repair/ Install steel driven Piers to rock or load bearing strata. Lift and support concrete foundation. Include any interior concrete work or use of poly foam if needed. Include hydro plumbing test if needed to check for leaks. <b>Place Steel piers as needed to lift, support, and level foundation, and floor. Place piers under floor for support and level. Clean and rake work area.</b>	Div.# NA	20 Ea	

**Total:**

All construction shall be in accordance with local codes, manufacturers' recommended installation procedures, good quality workmanship practices, General Specifications and Lead-Based Paint requirements when applicable. Conflicts between requirements will be resolved by compliance with the more stringent requirement. Contractor awarded the job will be responsible for conducting safe work practices that comply with OSHA Construction Standards for Asbestos Workers. Asbestos report, where required, will be attached if areas tested are 1% or greater. See attached Asbestos Sampling Report for location and testing of Planned Work Activities.



# HACN HOUSING REHAB SITE DIRECTIONS

---

Name: Beverly Scates


Telephone: (918)-834-4186

Address: 3507 East Xyler St.  
Tulsa, 74115

County: Tulsa Year Built: 1947

GPS Coordinates: 36.18774,-95.93753 Drive Time: 1-hour From Tahlequah

---

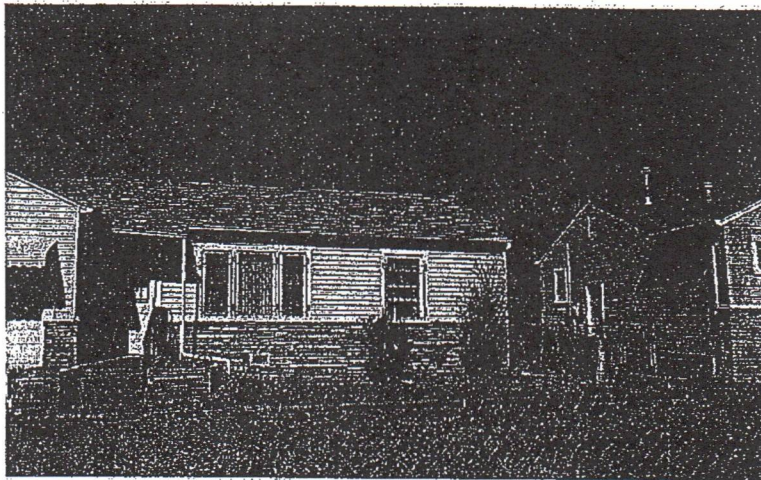

**Directions:** From Cherokee Nation, Hwy 82 North to Locust Grove, then 412 west to Tulsa, exit onto N. Harvard Ave, turn north, go to E. Xyler St., turn right and go to the 2<sup>nd</sup> block and 2<sup>nd</sup> house on the left, light green vinyl siding, with chainlink fence.

---

Mike Dreadfulwater  
Cost Estimator/Inspector

---

3/4/21  
Date